



Cable protection chain

KB390


Press-in



Material	Operating temperature
Special plastic	-30°C~100°C

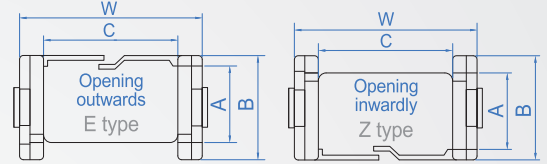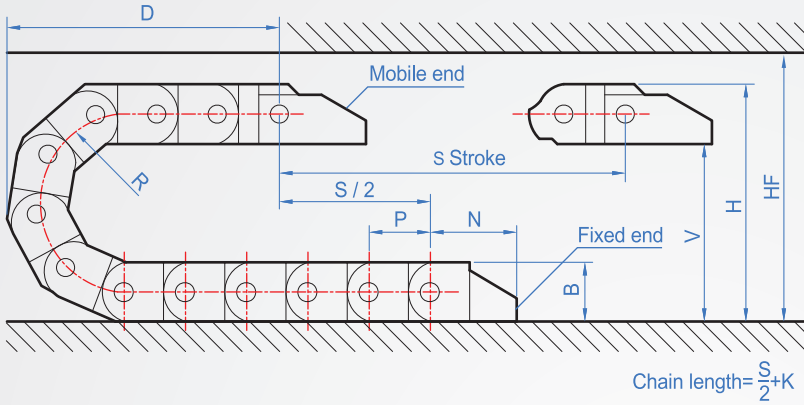

How to order



Opening chosen
 Opening outwards..... **E**
 Opening inwardly..... **Z**

*The crossbar does not overlap with the NO.8-10 gap 5.5mm, and the NO.8-16 gap 4.0mm.

NO.	R	Number of links	A	B	C	W	Collocation mounting code
*8-10	R28 R38 R48	1~50 Links/m=50	14.6	19.3	10	18.2	F390-8-10-PZ
*8-16					16	24.2	F390-8-16-PZ
8-20					20	28.2	F390-8-20-PZ
8-30					30	38.2	F390-8-30-PZ
8-40					40	48.2	F390-8-40-PZ
8-50					50	58.2	F390-8-50-PZ
14-15	R28 R38 R48 R75	1~33 Links/m=33	19	25	15	27	F390-14-15-PZ
14-25					25	37	F390-14-25-PZ
14-38					38	50	F390-14-38-PZ
14-50					50	62	F390-14-50-PZ
20-57	R55 R75 R100	1~22 Links/m=22	24.3	35	57	74.4	F390-20-57-PZ
26-75	R63 R75 R100	1~18 Links/m=18	36.5	50	75	92	F390-26-75-PZ

Series	R	K	H	HF	D	V	P	N	B
08	028	130	76	91	60	56.7	20	28	19.3
	038	160	96	111	70	76.7			
	048	190	116	131	80	96.7			
14	028	150	82	92	71	57	30.5	25	38
	038	185	102	112	81	77			
	048	215	122	132	91	97			
	075	300	177	187	120	152			
20	055	276	145	155	125	110	46	40	35
	075	346	185	195	150	150			
	100	414	235	245	170	200			
26	063	335	185	195	140	130	56	54	50
	075	375	205	215	150	150			
	100	475	255	265	175	200			

Copyright © CHENA INDUSTRIAL CO.,LTD ALL RIGHTS RESERVED.