


Economical Type  
**BB607**

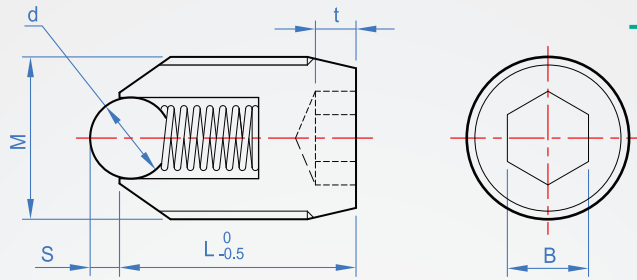

| Main part               | Steel ball        | Compression spring |
|-------------------------|-------------------|--------------------|
| SCM435<br>(Black oxide) | SUJ2<br>HRC58~65° | SUS304             |
| SUS304                  | SUS304            |                    |

How to order

1  
 BB607 - M3 -   
 TYPE M  
 Material chosen  
 SCM435.....   
 SUS304.....



Unit : mm

| M   | Pitch | L    | Hex hole |     | d    | S   | Pressure test (kgF) |      |
|-----|-------|------|----------|-----|------|-----|---------------------|------|
|     |       |      | B        | t   |      |     | min.                | max. |
| M3  | 0.5   | 7    | 1.5      | 1.5 | 1.59 | 0.5 | 0.3                 | 0.5  |
| M4  | 0.7   | 9.1  | 2        | 2   | 2.5  | 0.9 | 0.8                 | 1.4  |
| M5  | 0.8   | 12   | 2.5      | 2.2 | 3    | 1.1 | 0.9                 | 1.5  |
| M6  | 1     | 14.6 | 3        | 2.8 | 3.5  | 1.2 | 1                   | 1.7  |
| M8  | 1.25  | 15   | 4        | 3.5 | 4.76 | 1.8 | 1.5                 | 2.8  |
| M10 | 1.5   | 17   | 5        | 4   | 6    | 2.1 | 2                   | 4    |
| M12 | 1.75  | 22   | 6        | 3.5 | 7.94 | 2.8 | 4                   | 7.6  |

**Che Na**


FAX 886-2688-3177

info@chena.com.tw

886-22688-3188  
886-2688-3881~3

No.21, Guangrong St. Shulin Dist.,  
New Taipei City 238 Taiwan (R.O.C.)

Economical Type  
**BB607**

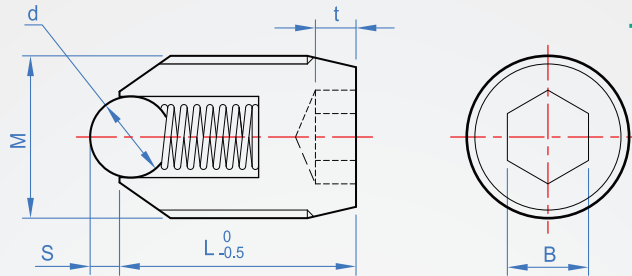

| Main part               | Steel ball        | Compression spring |
|-------------------------|-------------------|--------------------|
| SCM435<br>(Black oxide) | SUJ2<br>HRC58~65° | SUS304             |
| SUS304                  | SUS304            |                    |

How to order

BB607 - M3 - 
  
 TYPE M

Material chosen
   
 SCM435..... 
  
 SUS304.....



Unit : mm

| M   | Pitch | L    | Hex hole |     | d    | S   | Pressure test (kgF) |      |
|-----|-------|------|----------|-----|------|-----|---------------------|------|
|     |       |      | B        | t   |      |     | min.                | max. |
| M3  | 0.5   | 7    | 1.5      | 1.5 | 1.59 | 0.5 | 0.3                 | 0.5  |
| M4  | 0.7   | 9.1  | 2        | 2   | 2.5  | 0.9 | 0.8                 | 1.4  |
| M5  | 0.8   | 12   | 2.5      | 2.2 | 3    | 1.1 | 0.9                 | 1.5  |
| M6  | 1     | 14.6 | 3        | 2.8 | 3.5  | 1.2 | 1                   | 1.7  |
| M8  | 1.25  | 15   | 4        | 3.5 | 4.76 | 1.8 | 1.5                 | 2.8  |
| M10 | 1.5   | 17   | 5        | 4   | 6    | 2.1 | 2                   | 4    |
| M12 | 1.75  | 22   | 6        | 3.5 | 7.94 | 2.8 | 4                   | 7.6  |