

Economical type
WA668
 Negative tolerance

Material Heat treatment



SUJ2 HRC58



Standard : Flat head



G : Round head

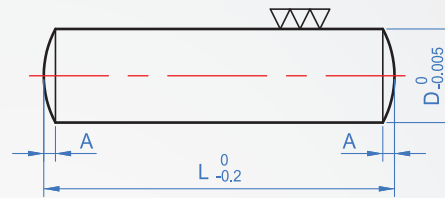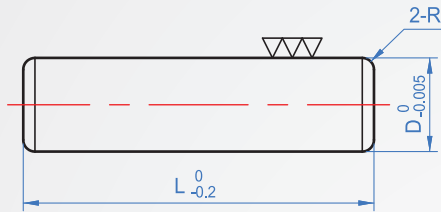

How to order

WA668 - 1 - 6
 TYPE D L

1

2

Unit : mm

| D | Tolerance | L | | | | | | | | | | | | | A | R | | | |
|-----|--------------|---|---|---|-----|-----|------|------|------|------|------|------|------|------|------|---|------|-----|-----|
| 1 | +0 -0.005 | | | 6 | | 8 | | | | | | | | | | | 0.12 | 0.4 | |
| 1.5 | | | | 6 | 7 | 8 | 10 | 12 | | | | | | | | | 0.2 | | |
| 2 | | 4 | 5 | 6 | | 8-G | 10-G | 12-G | 14-G | 15-G | 16-G | 18-G | 20-G | 25 | | | 0.25 | | |
| 2.5 | | 4 | | | 7-G | 8-G | 10-G | 12-G | 14-G | 15-G | 16-G | 18-G | 20-G | 25-G | | | 0.3 | | |
| 3 | | | 5 | 6 | | 8 | 10 | 12 | 14 | 15 | 16 | 18 | 20-G | 25 | 30-G | | 0.4 | | |
| 3.5 | | | 5 | 6 | | 8-G | 10-G | 12-G | 14-G | | 16 | 18-G | 20 | 25-G | 30 | | 0.45 | | 0.5 |
| 4 | | | 5 | 6 | | 8 | 10 | 12 | 14 | 15 | 16 | 18-G | 20 | 25 | 30 | | 0.5 | | 0.6 |
| 5 | | | 5 | 6 | | 8 | 10 | 12 | 14 | 15 | 16 | 18 | 20 | 25 | 30 | | 0.63 | | 0.8 |
| 6 | | | 5 | 6 | | 8 | 10 | 12 | 14 | 15 | 16 | 18 | 20 | 25 | 30 | | 0.8 | | 0.9 |
| 8 | | | | | | 8 | 10-G | 12 | 14 | | 16 | | 20 | 25 | 30 | | 1 | | 1.0 |

※ L dimensions value have " -G " are shipped round head type.