



SUS  
**WA663** Corrosion resistance

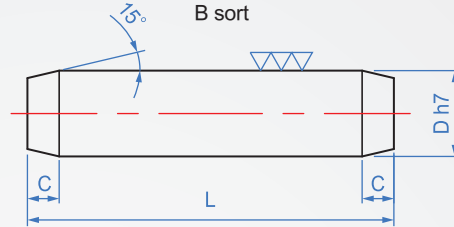

Sort	Material	Hardness
Parallel PIN-A	S45C-Q Solution treatment	HRC23~33
Parallel PIN-B		

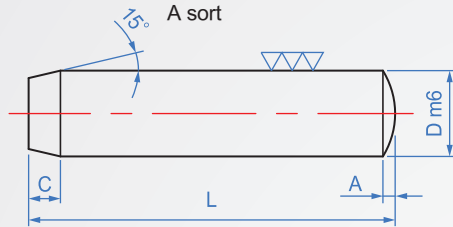

How to order

WA663 - 1 - 4 -

TYPE D L

Sort chosen

Parallel PIN-A.....  A

Parallel PIN-B.....  B

D	A sort m6	B sort h7	L												C	A		
			Tol.±0.25						Tol.±0.5								±0.75	
1	+0.008 +0.002	+0 -0.010	4	5	6	8	10	12									0.2	0.12
1.2			4	5	6	8	10	12									0.25	0.16
1.5			4	5	6	8	10	12									0.3	0.2
1.6			4	5	6	8	10	12	15								0.35	0.25
2			4	5	6	8	10	12	15	16	20						0.4	0.3
2.5			5	6	8	10	12	15	16	20	25						0.5	0.4
3			5	6	8	10	12	14	15	16	20	25	30				0.63	0.5
4	+0.012 +0.004	+0 -0.012	5	6	8	10	12	14	15	16	20	25	30			0.8	0.63	
5			(6)	8	10	12	14	15	16	20	25	30			1.2	0.8		
6			(8)	10	12	14	15	16	20	25	30	40			1.6	1		
8			10	12	14	15	16	20	25	30	40	50			2	1.12		
10	+0.018 +0.007	+0 -0.018						(15)	(16)	20	25	30	40	50	60	2.5	1.6	
12			20	25	30	40	50	60										

※The value in the L size ( ) is only applicable to A sort.

Copyright © CHENA INDUSTRIAL CO., LTD ALL RIGHTS RESERVED.

**Che Na**

FAX 886-2688-3177

info@chena.com.tw

886-22688-3188  
886-2688-3881~3

No.21, Guangrong St. Shulin Dist.,  
New Taipei City 238 Taiwan (R.O.C.)