


Bellows type  
**GZ436**  
Socket set

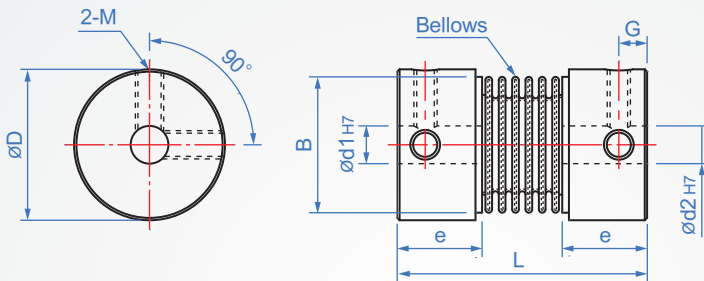

Ontology	Bellows	Stop screw
AL-High strength aluminum alloy (Anodizing)	Stainless steel	CM435 (Dye black)
SUS		SUS

How to order

GZ436 - 16 - 4x4 -

TYPE      D      d1xd2

Select the body material

AL-High strength aluminum alloy..  blank

SUS.....  SUS

D	Inner hole designation d1-d2		B	L	e	G	M	Max. torque (N · m)		Max. return speed (rpm/min)		Moment of inertia (kg · m <sup>2</sup> )	Static torsion spring coefficient (N · m/rad)	Allowable axial displacement (mm)	Allow eccentricity (mm)	Weight(g)	
	min.	max.						AL	SUS	AL	SUS					AL	SUS
	unit : mm																
16	4	~ 8	13.5	27	9.5	3	M3	0.8	1.2	20000	16000	7.9 x 10 <sup>-7</sup>	150	-1.0 ~ +0.3	0.1	8	22
20	5	~ 12	18	32	10	3.5		1.5	2.2	18000	13000					2.0 x 10 <sup>-6</sup>	220
22.5	5	~ 12	20.2	34	10.85	3.6	M4	1.8	2.7	16000	12000	6.2 x 10 <sup>-6</sup>	300	-1.3 ~ +0.5	0.15	22	54
25	6	~ 12		37	12.5	4.5		2	3	15000	11000					6.7 x 10 <sup>-6</sup>	330
32	8	~ 15	27.2	42	12	5.5	M5	2.5	3.7	11000	10000	2.0 x 10 <sup>-5</sup>	490	-1.5 ~ +0.7	0.2	53	128
40	8	~ 20	34.5	51	15.5			5.5	10	15	10000					8000	2.1 x 10 <sup>-5</sup>
55	10	~ 25	51.9	57	15	6.25	M6	22	33	9000	6000	2.8 x 10 <sup>-5</sup>	860	-1.5 ~ +0.7	0.2	170	514
65	10	~ 38	60.5	81	26.5	8.9	M8	55	80	4500	4000	2.8 x 10 <sup>-5</sup>	900			280	1100
82	20	~ 42	76.3	103	33.3	10		M10	70	102	3500	3000	6.0 x 10 <sup>-5</sup>	1200	-1.8 ~ +0.8	0.2	1080
105	20	~ 50	100.7	130	51.5		10		200	290	3000	3000	1.7 x 10 <sup>-4</sup>	2067			2400

Allowable declination : 2°