


Flange - Resin pin

PP635

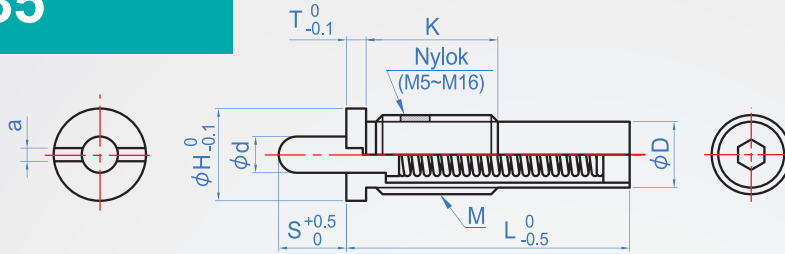

Type	Main part	Pin
Light load L	S45C HRC29~35 (Black oxide)	POM

Spring : SWP-B

How to order

PP635 - M3 - 1.5
 | | |
 TYPE M S

1		2		Unit : mm									
M Coarse thread	S	L	d	D	H	K	T	a	Light load		Applicable spanner		
									min.	max.			
M3	1.5	10	1.1	2.35	5	5	1.5	0.5	0.49	1.0	Flathead screwdriver		
	3	15							0.29	1.0			
M4	2	15	1.6	3.1	6	6	1.8	0.7	1.0	2.0			
	4	24							0.59	2.0			
M5	3	20	2	3.8	7	8	2	1.2	2.0	9.8	P-1		
	5	27							2.0	9.8			
M6	3	25	2.5	4.7	8	9	2.5	1.5	5.9	9.8	P-2A		
	5	30							2.0	9.8			
M8	3	25	3.1	6.1	10	12	2.5	1.5	5.9	9.8	P-2A		
	5	27							2.9	9.8			
M10	5	30	3.8	7.5	12	15	3	2.0	5.9	14.7	P-3		
	10	43							2.9	14.7			
M12	5	30	5.5	9.2	14	20	3	2.0	5.9	14.7	P-3		
	10	43							2.9	19.6			
M16	10	60	8	13	18	25	3	2.0	5.9	39.2	P-4		
	15	60							3.9	39.2			
	20	85							4.9	39.2			
	30	125							2.9	39.2			

※M3・M4 have not Nylok.

Load N × 0.101972 = Load (kgf)