


6

Steel ball latch

Basic

BL616

SUS

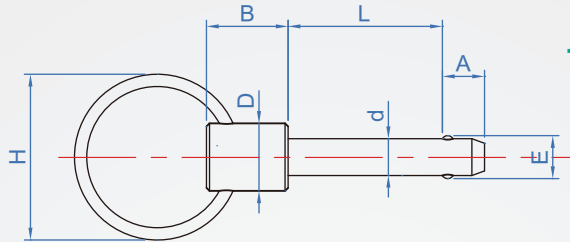

Steel ball	Pin	Spring	Ring
SUS	SUS303	SUS	SUS

How to order

1 2
 BL616 - 10 - 30
 TYPE Diameter Length

unit : mm																			
d ^{+0.04} -0.08	E	指定長度 L ^{+0.5} -0										A (±0.2)	B	C	D	Corresponding Hole	tolerance H8		
		10	15	20	25	30	35	40	50	60	65							70	80
5	5.2	10	15	20	25	30								8.4	9.2		8	5	+0.018
6	6.9	10	15	20	25	30	35	40	50					8.7		24	9.5	6	-0
8	9.4		15	20	25	30	35	40	50					9.1	12.7		11	8	+0.022
10	11.5		15	20	25	30	35	40	50	60	65	70		10		30	12.7	10	-0
12	13.8		15	20	25	30	35	40	50	60	65	70		13.1			16	12	+0.027
16	18.5		15	20	25	30	35	40	50	60	65	70	80	100	17		19	16	-0
20	22.9			20	25	30	35	40	50	60	65	70	80	100	19		22.2	20	+0.033
25	29				25	30	35	40	50	60	65	70	80	100	25		28.5	25	-0

*L size length can be customized

Che Na

FAX 886-2688-3177

info@chena.com.tw

886-22688-3188
886-2688-3881~3

No.21, Guangrong St. Shulin Dist.,
New Taipei City 238 Taiwan (R.O.C.)

Copyright © CHENA INDUSTRIAL CO.,LTD ALL RIGHTS RESERVED.