


Press-fit  
**ZC608**  
Inch



	Bead	
	Material	Hardness
SUS303	SUS440C	55HRC~
	POM	-
Spring:SUS631J1		

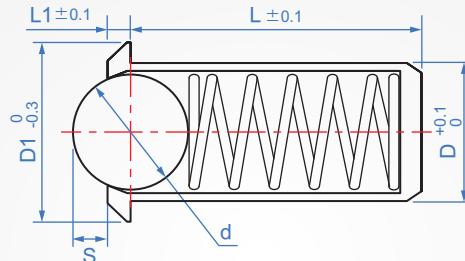

How to order ☺

ZC608-0.125-1H-  
 TYPE D N  
 SUS440C.....SUS  
 POM.....POM

D	Elastic force N	L	D1	S	d	L1	Elastic force(N)				unit:inch
							1H	min.	max.	2H	
0.125	1H	0.252	0.187	0.035	0.094	0.032	1.8	5.9	3.4	12	
0.188			0.394	0.25	0.058	0.156	0.04	4.5	11.3	9	22
0.25			0.471	0.312	0.07	0.187	0.045	6.8	15.8	13.5	30
0.312		0.643	0.375	0.09	0.25	9	22.5	18	45		
0.375			0.786	0.5	0.11	0.312	0.078	11.3	31.5	22.5	62
0.5		1.1	0.688	0.161	0.437	0.11	18	40.5	36	80	

kgf=NX0.101972