






Small flange type BH554

※Features :
It is convenient to use the head cross or the hexagonal head screw to fix it. Compared with the previous countersunk hole design, the flange diameter is smaller, which saves space.



F : Round

H : Two plane shape

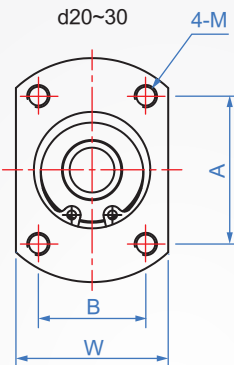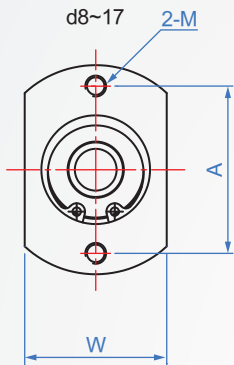


Appearance

Appearance	Material	Finish	Bearing
F Round	Iron S45C	TN Electroless nickel	SUJ2 (JIS 0)
	Aluminum A6061	AS Clear anodizing	
H Two plane shape	Iron S45C	TN Electroless nickel	
	Aluminum A6061	AS Clear anodizing	

※Accessory C-type buckle (SUS304).

Installation use case



How to order?

BH554 - [] - 6900ZZ - []

TYPE 軸承代號

選擇外型
 圓形..... F
 二平面形..... H

選擇表面處理
 鐵+鍍硬鎳..... CR
 鐵+鍍無電解鎳..... TN
 鋁+白色陽極..... AS

1

2

unit : mm

Bearing code	d	D H7	Allowable tolerance	T	H	e	W	K	P.C.D	A	B	X (M Coarse teeth)
608ZZ	8	22	+0.021 0	12	40	7	26	18	31	31	-	M5
628ZZ		24		13	42	8	29	20	33	33		
6900ZZ	10	22		11	40	6	26	19	31	31		
6000ZZ		26		13	44	8	31	22	35	35		
6200ZZ		30		14	48	9	35	24	39	39		
6901ZZ	12	24		11	42	6	28	21	33	33		
6001ZZ		28	13	46	8	33	24	37	37			
6902ZZ	15	32	12	49	7	34	25	39	39			
6002ZZ		35	14	53	9	37	28	43	43			
6202ZZ		35	17	56	11	41	29	46	46			
6003ZZ	17	35	16	56	10	41	31	46	46			
6203ZZ		40	18	61	12	47	34	51	51			
6904ZZ	20	37	15	64	9	44	34	51	45	24	M8	
6004ZZ		42	18	69	12	51	36	56	46	32		
6204ZZ		47	20	74	14	55	40	61	50	34		
6005ZZ	25	47	18	80	12	55	41	64	52	36	M10	
6205ZZ		52	22	85	15	61	45	69	56	39		
6006ZZ	30	55	20	88	13	63	48	72	59	40	M10	
6206ZZ		62	23	95	16	71	55	79	65	44		