


Bearing type on both sides

BH557



Appearance	Material	Surface treatment	Bearing
F Round	SUS303	-	SUS
	Aluminum A6061	AS White anode	SUJ2
		AB Black anode	
H Diplanar	SUS303	-	SUS
	Aluminum A6061	AS White anode	SUJ2
		AB Black anode	

※Bearing accuracy: JIS level 0

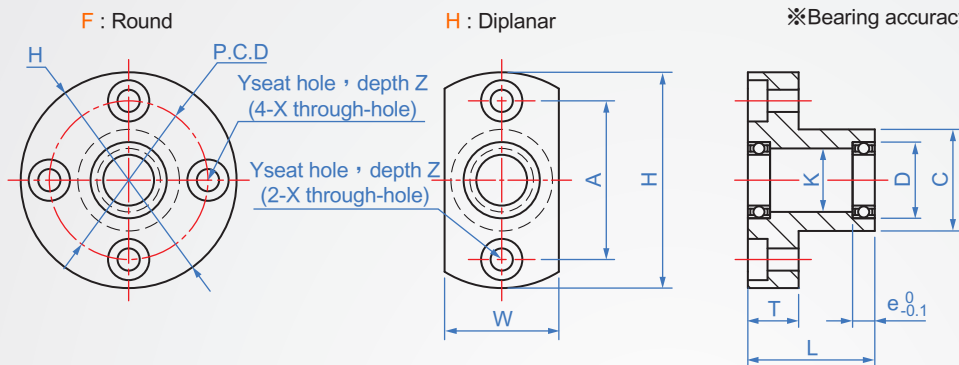

How to order

BH557 - -

TYPE Bearing code

Choose shape

Round.....

Diplanar.....

Select materials and finishes

SUS303.....

Aluminum + white anode....

Aluminum + black anode....

unit : mm

Bearing code	d	D H7	Tol.	L	T	H	e	W	P.C.D	C g7	Tol.	K	A	X	Y	Z	
606ZZ	6	17	+0.018 0	20	8	39	6	23	29	21	-0.007 -0.028	13	29	4.5	8	4.1	
626ZZ		19	+0.021 0	25		41	6	25	31	24		15	31				
678ZZ	8	12	+0.018 0	20	8	34	3.5	18	25	16	-0.006 -0.024	10	25	3.5	6.5	3.1	
698ZZ		19	+0.021 0	25		41	6	25	31	24		-0.007 -0.028	15	31	4.5	8	4.1
608ZZ		22				45	7	29	35	27			18	35			
628ZZ		24				47	8	32	37	30			20	37			
6700ZZ	15	+0.018 0			20	8	37	4	22	27	19		-0.007 -0.028	12			
6800ZZ	19	+0.021 0	25	41			5	25	31	24	-0.009 -0.034	15		31			
6900ZZ	22			+0.021 0	25	8	45	6	29	35		27	-0.009 -0.034	19	35	4.5	8
6000ZZ	26	+0.025 0	30				10	50	8	34	40	32		-0.009 -0.034	22		
6200ZZ	30			+0.021 0	25	8		54	9	38	44	36	-0.007 -0.028		24	44	4.5
6701ZZ	18	+0.018 0	20				8	40	4	25	30	23		-0.007 -0.028	15	30	4.5
6801ZZ	21	+0.021 0	25	10	44	5		29	34	26	-0.007 -0.028	17	34				
6901ZZ	24				+0.021 0	25	8	48	6	31		38	30	-0.009 -0.034	21	38	4.5
6001ZZ	28	+0.025 0	30	10				52	8	36	42	34	-0.009 -0.034		24	42	
6201ZZ	32				+0.021 0	25	8	56	10	40	46	38		-0.007 -0.028	26	46	4.5
6702ZZ	21	+0.021 0	25	10				44	4	29	34	26	-0.007 -0.028		18	34	
6802ZZ	24				+0.021 0	25	8	47	5	32	37	30		-0.009 -0.034	20	37	4.5
6902ZZ	28	+0.025 0	30	10				57	7	37	45	35	-0.009 -0.034		25	45	
6002ZZ	32				+0.025 0	35	10	60	9	40	48	38		-0.009 -0.034	28	48	5.5
6202ZZ	35	+0.021 0	30	10				64	11	44	52	42	-0.009 -0.034		29	52	4.5
6803ZZ	26				+0.021 0	30	10	50	5	34	40	32		-0.009 -0.034	22	40	
6903ZZ	30	+0.025 0	35	10				60	7	38	48	36	-0.009 -0.034		27	48	4.5
6003ZZ	35				+0.025 0	40	10	66	10	44	54	42		-0.009 -0.034	31	54	
6203ZZ	40	+0.021 0	25	8				72	12	50	60	48	-0.009 -0.034		34	60	4.5