

Basic type BH551



Appearance	Material	Surface finish	Bearing
F Round	Iron S45C	TB Blackened	SUJ2 (JIS 0)
		TN Electroless nickel	
H Two plane shape	Aluminum A6061	AS Clear anodizing	
		SUS303 Degreased	


※Countersink through part tapping design, positive and negative two sides can be installed.

※Countersink dimension please use low small head cap screws.


※Accessory : C type retaining ring(SUS304)

F : Round

H : Two plane shape

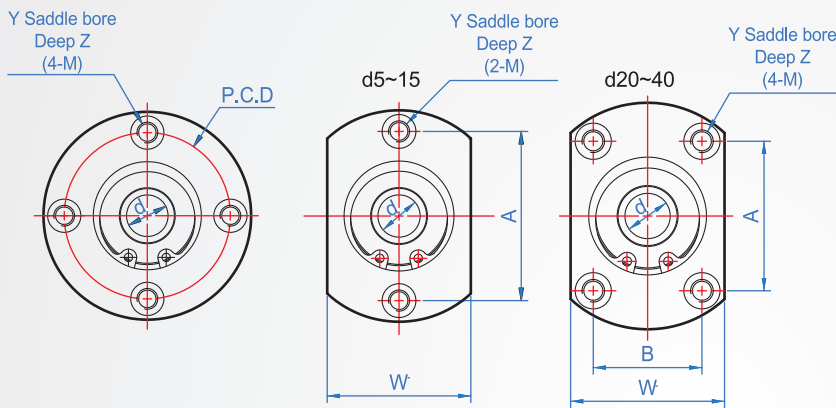

How to order

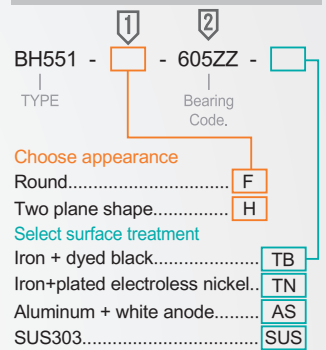

2

Unit : mm

Bearing Code.	d	D H7	Tolerances	T	H	e	W	K	P.C.D	A	B	X (Coarse thread)	Y	Z		
605ZZ	5	14	+0.018 0	10	36	5	20	10	26	26	-	4.3 (M5×0.8)	8	4.4		
625ZZ		16			38		12	28	28							
606ZZ	6	17	11	39	23	13	29	29								
626ZZ		19		41	25	15	31	31								
698ZZ	8	22	12	45	7	29	18	35	35							
608ZZ		24		47	8	32	20	37	37							
628ZZ	10	22	+0.021 0	11	45	6	29	19	35	35						
6900ZZ		26			13	50	8	34	22	40		40				
6200ZZ	12	30	14	54	9	38	24	44	44							
6901ZZ		24		11	48	6	31	21	38	38						
6001ZZ	15	28	12	52	8	36	24	42	42							
6902ZZ		32		14	60	9	40	28	48	48						
6002ZZ	20	35	+0.025 0	17	64	11	44	29	52	52						
6202ZZ		37			15	69	9	47	34	56	51	24				
6904ZZ	25	42	18	77	12	54	36	64	56	32	6.8 (M8×1.25)	11	6.5			
6004ZZ		47		20	81	14	58	40	68	59				34		
*6005ZZ-TN	30	18	+0.030 0	22	88	12	58	41	72	63				8.5 (M10×1.5)	14	8.6
*6205ZZ-TN		25			22	94	15	64	45	78						
*6006ZZ-TN	35	20	20	96	13	66	48	80	70	40						
*6206ZZ-TN		30		23	104	16	74	55	88	77						
*6007ZZ-TN	40	21	21	104	14	74	55	88	75	44						
*6008ZZ-TN		35		23	114	15	82	60	96	80	54					

* Bearing designations are only available in iron.