

Pitch : 5.0mm

AT5

2


Belt width	10	15	20	25	Unit weight (Width:1mm)
Ti Initial tension (N)	24.5	39	59	74	2.0 g/m
Td Pressing load (N)	1.9	2.8	3.9	4.9	

Belt OPEN free length

length (m)



Min. 1M (200 teeth)	Max. 100M (20000 teeth)
---------------------------	-------------------------------

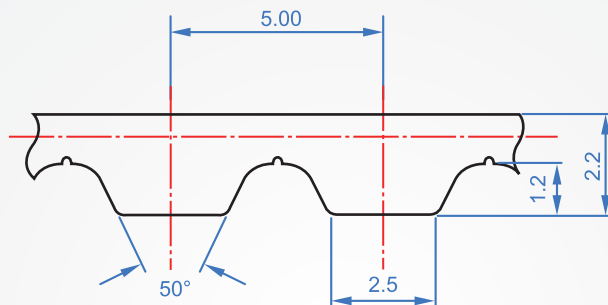

## How to order

PU - AT5 - 500 - 15  
Material TYPE Belt circumference Belt width

Belt chosen OPEN free length  
 Example : Polyurethane  
 OPEN-AT5-10-2.4M-PU

Material : PU, steel wire core buried.

1 20~82 teeth	
Belt Circumference mm	Number of Teeth
225	45
255	51
280	56
300	60
330	66
340	68
375	75
390	78
420	84

1 84~150 teeth	
Belt Circumference mm	Number of Teeth
450	90
455	91
500	100
545	109
600	120
660	132
710	142
720	144
750	150

1 153~400 teeth	
Belt Circumference mm	Number of Teeth
780	156
815	163
825	165
860	172
975	195
1020	210
1125	225
1500	300
2000	400

※Length other than those listed in the table can be customized, use hot melt convergence, which will reduce torque and tension values;  
Only for low-speed operation and transportation purposes.

Che Na

886-2688-3177

info@chena.com.tw

 886-22688-3188  
886-2688-3881~3

 No.21, Guangrong St. Shulin Dist.,  
New Taipei City 238 Taiwan (R.O.C.)