


SUS  
**PP632**

Type	Main part	Pin		Operating temperature
		Material	Hardness	
Light load L	Quite SUS304	SUS440C	55HRC~	-30°C~260°C
Heavy load H				
Extremely heavy X				

Spring : SUS631

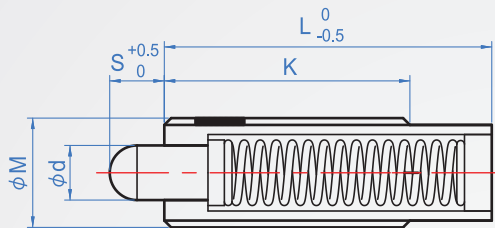

How to order

PP632 - **L** - M3 - 1.5  
 TYPE M S  
 Load chosen  
 Light load..... **L**  
 Heavy load..... **H**  
 Extremely heavy..... **X**

M Coarse thread	S	B	d	K	L	Load (N)						Applicable spanner
						Light load <b>L</b>		Heavy load <b>H</b>		Extremely heavy <b>X</b>		
						min.	max.	min.	max.	min.	max.	
M3	1.5	0.9	1.1	15	15	0.4	1.3	0.8	2.94	1.1	3.42	Flathead screwdriver
	3					0.2	1.3	0.6	2.93	0.8	3.41	
M4	2	1.3	1.6	15	15	0.9	2.0	2.0	8.8	6.1	13.8	P-1
	4					0.6	2.1	1.9	8.75	5.8	13.6	
M5	3	1.5	2.0	20	20	1.4	9.7	2.7	16.3	6.8	22.0	P-1
	5					1.1	10.3	1.0	17.1	5.7	21.5	
M6	3	2	2.5	25	25	6.0	9.8	8.0	26.4	15.8	35.6	P-1
	5					3.4	9.86	4.4	26.6	12.9	34.4	
M8	3	2.5	3.1	25	25	6.0	9.9	14.7	27.0	21.9	36.3	P-2
	5					4.0	9.83	6.7	26.6	14.7	34.5	
M10	5	3	3.8	30	30	5.7	14.7	8.2	45.7	24.5	58.6	P-2
	10					4.4	14.7	6.2	45.1	19.8	58.7	
M12	5	4	5.5	30	30	5.8	14.7	18.2	49	34.9	63.6	P-3
	10					5.0	14.7	8.2	49.1	25.5	63.6	
M16	15	5	8.0	35	51	6.9	14.7	7.5	48.9	20.1	63.7	P-3
	10					9.2	34.2	18.9	68.5	38.7	88.4	
	15					8.6	34.4	14.4	68.6	33.9	88.1	
	20			35	65	7.1	34.4	4.2	68.6	25.4	88.1	P-4

Load N×0.101972=Load (kgf)

Copyright © CHENA INDUSTRIAL CO., LTD ALL RIGHTS RESERVED.

**Che Na**

FAX 886-2688-3177

info@chena.com.tw


886-22688-3188  
886-2688-3881~3

No.21, Guangrong St. Shulin Dist.,  
New Taipei City 238 Taiwan (R.O.C.)


SUS  
**PP632**

Type	Main part	Pin		Operating temperature
		Material	Hardness	
Light load L	Quite SUS304	SUS440C	55HRC~	-30°C~260°C
Heavy load H				
Extremely heavy X				

Spring : SUS631

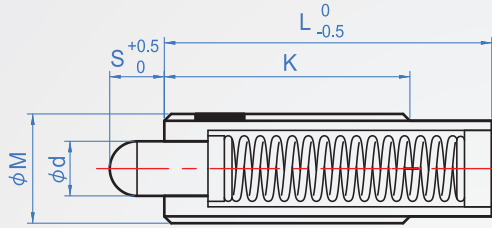

How to order



M Coarse thread	S	B	d	K	L	Load (N)						Applicable spanner		
						Light load <b>L</b>		Heavy load <b>H</b>		Extremely heavy <b>X</b>				
						min.	max.	min.	max.	min.	max.			
M3	1.5	0.9	1.1	15	15	0.4	1.3	0.8	2.94	1.1	3.42	Flathead screwdriver		
	3					0.2	1.3	0.6	2.93	0.8	3.41			
M4	2	1.3	1.6	15	15	0.9	2.0	2.0	8.8	6.1	13.8		P-1	
	4					0.6	2.1	1.9	8.75	5.8	13.6			
M5	3	1.5	2.0	20	20	1.4	9.7	2.7	16.3	6.8	22.0			P-1
	5					1.1	10.3	1.0	17.1	5.7	21.5			
M6	3	2	2.5	25	25	6.0	9.8	8.0	26.4	15.8	35.6	P-1		
	5					3.4	9.86	4.4	26.6	12.9	34.4			
M8	3	2.5	3.1	25	25	6.0	9.9	14.7	27.0	21.9	36.3		P-2	
	5					4.0	9.83	6.7	26.6	14.7	34.5			
M10	5	3	3.8	30	30	5.7	14.7	8.2	45.7	24.5	58.6			P-2
	10					4.4	14.7	6.2	45.1	19.8	58.7			
M12	5	4	5.5	30	30	5.8	14.7	18.2	49	34.9	63.6	P-3		
	10					6.9	14.7	7.5	48.9	20.1	63.7			
M16	15	5	8.0	35	57	9.2	34.2	18.9	68.5	38.7	88.4		P-4	
	10					8.6	34.4	14.4	68.6	33.9	88.1			
	20			35	65	7.1	34.4	4.2	68.6	25.4	88.1			

Load N×0.101972=Load (kgf)