


Pitch : 5.0mm

5GT



material : CR synthetic rubber, fiberglass thread.
Use temperature -10~50 ° C.

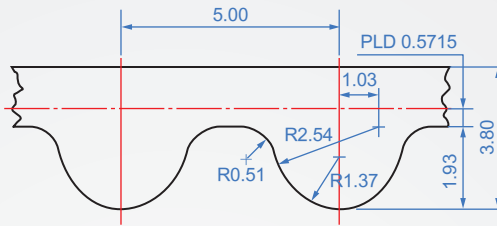

Width code	9	15	20	25	30	40	Unit weight (Width:1mm)
Ti Initial tension (N)	55	96	137	178	220	302	4 g/m
Td Pressing load (N)	3.9	6.9	9.8	13	16	22	

How to order

1 CR - 185 - 5GT - 15
 Material Belt circumference

2
 Belt width

37~106 teeth		
Code	Belt circumference mm	Number of teeth
185-5GT	185	37
225-5GT	225	45
230-5GT	230	46
240-5GT	240	48
185-5GT	185	49
225-5GT	225	50
230-5GT	230	51
240-5GT	240	52
270-5GT	270	54
275-5GT	275	55
295-5GT	295	59
300-5GT	300	60
315-5GT	315	63
320-5GT	320	64
340-5GT	340	68
350-5GT	350	70
360-5GT	360	72
365-5GT	365	73
370-5GT	370	74
375-5GT	375	75
385-5GT	385	77
390-5GT	390	78
400-5GT	400	80
405-5GT	405	81
410-5GT	410	82
415-5GT	415	83
420-5GT	420	84
430-5GT	430	86
435-5GT	435	87
440-5GT	440	88
450-5GT	450	90
460-5GT	460	92
465-5GT	465	93
470-5GT	470	94
475-5GT	475	95
485-5GT	485	97
490-5GT	490	98
500-5GT	500	100
505-5GT	505	101
510-5GT	510	102
520-5GT	520	104
525-5GT	525	105
530-5GT	530	106
540-5GT	540	108

108~192 teeth		
Code	Belt circumference mm	Number of teeth
545-5GT	545	109
550-5GT	550	110
560-5GT	560	112
565-5GT	565	113
570-5GT	570	114
575-5GT	575	115
580-5GT	580	116
595-5GT	595	119
600-5GT	600	120
610-5GT	610	122
615-5GT	615	123
625-5GT	625	125
635-5GT	635	127
645-5GT	645	129
655-5GT	655	131
670-5GT	670	134
675-5GT	675	135
695-5GT	695	139
700-5GT	700	140
710-5GT	710	142
720-5GT	720	144
730-5GT	730	146
740-5GT	740	148
750-5GT	750	150
770-5GT	770	154
775-5GT	775	155
800-5GT	800	160
810-5GT	810	162
815-5GT	815	163
825-5GT	825	165
830-5GT	830	166
840-5GT	840	168
845-5GT	845	169
850-5GT	850	170
860-5GT	860	172
870-5GT	870	174
880-5GT	880	176
895-5GT	895	179
900-5GT	900	180
920-5GT	920	184
935-5GT	935	187
960-5GT	960	192
970-5GT	970	194

194~728 teeth		
Code	Belt circumference mm	Number of teeth
1000-5GT	1000	200
1025-5GT	1025	205
1050-5GT	1050	210
1080-5GT	1080	216
1090-5GT	1090	218
1145-5GT	1145	229
1155-5GT	1155	231
1165-5GT	1165	233
1170-5GT	1170	234
1180-5GT	1180	236
1190-5GT	1190	238
1210-5GT	1210	242
1225-5GT	1225	245
1250-5GT	1250	250
1270-5GT	1270	254
1290-5GT	1290	258
1315-5GT	1315	263
1330-5GT	1330	266
1390-5GT	1390	278
1400-5GT	1400	280
1440-5GT	1440	288
1475-5GT	1475	295
1500-5GT	1500	300
1530-5GT	1530	306
1535-5GT	1535	307
1550-5GT	1550	310
1585-5GT	1585	317
1615-5GT	1615	323
1630-5GT	1630	326
1675-5GT	1675	335
1690-5GT	1690	338
1715-5GT	1715	343
1800-5GT	1800	360
1875-5GT	1875	375
1960-5GT	1960	392
2115-5GT	2115	423
2200-5GT	2200	440
2350-5GT	2350	470
2495-5GT	2495	499
2645-5GT	2645	529
2910-5GT	2910	582
3175-5GT	3175	635
3640-5GT	3640	728

Copyright © CHENA INDUSTRIAL CO., LTD ALL RIGHTS RESERVED.