
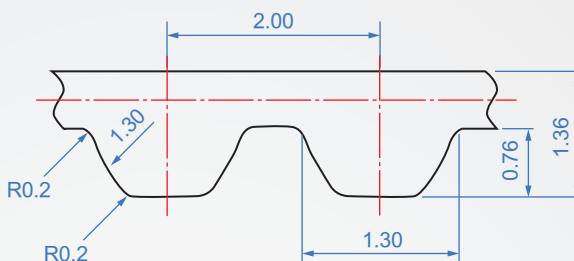


Pitch : 2.0mm


# S2M



## Width code

	4	6	10	Unit weight (Width:1mm)
Ti Initial tension (N)	5.9	9.8	16.7	1.3 g/m
Td Pressing load (N)	0.4	0.7	1.1	

## How to order



Belt chosen OPEN free length

For example: rubber OPEN-S2M-G-1.1M-CR

material : CR synthetic rubber, fiberglass thread.

Use temperature -10~50 ° C.

### 1

#### 33~93 teeth

Code	Belt circumference mm	Number of teeth
66-S2M	66	33
72-S2M	72	36
74-S2M	74	37
76-S2M	76	38
78-S2M	78	39
80-S2M	80	40
84-S2M	84	42
86-S2M	86	43
88-S2M	88	44
90-S2M	90	45
92-S2M	92	46
94-S2M	94	47
96-S2M	96	48
98-S2M	98	49
100-S2M	100	50
102-S2M	102	51
104-S2M	104	52
106-S2M	106	53
110-S2M	110	55
112-S2M	112	56
114-S2M	114	57
116-S2M	116	58
118-S2M	118	59
120-S2M	120	60
122-S2M	122	61
124-S2M	124	62
126-S2M	126	63
128-S2M	128	64
130-S2M	130	65
132-S2M	132	66
134-S2M	134	67
138-S2M	138	69
140-S2M	140	70
142-S2M	142	71
144-S2M	144	72
146-S2M	146	73
148-S2M	148	74
150-S2M	150	75
152-S2M	152	76
156-S2M	156	78
158-S2M	158	79
160-S2M	160	80
164-S2M	164	82
166-S2M	166	83
168-S2M	168	84
170-S2M	170	85
172-S2M	172	86
174-S2M	174	87
176-S2M	176	88
178-S2M	178	89
180-S2M	180	90
182-S2M	182	91
184-S2M	184	92
186-S2M	186	93

### 1

#### 94~151 teeth

Code	Belt circumference mm	Number of teeth
188-S2M	188	94
190-S2M	190	95
192-S2M	192	96
194-S2M	194	97
196-S2M	196	98
198-S2M	198	99
200-S2M	200	100
202-S2M	202	101
204-S2M	204	102
206-S2M	206	103
208-S2M	208	104
210-S2M	210	105
212-S2M	212	106
214-S2M	214	107
216-S2M	216	108
218-S2M	218	109
220-S2M	220	110
224-S2M	224	112
226-S2M	226	113
230-S2M	230	115
232-S2M	232	116
234-S2M	234	117
236-S2M	236	118
238-S2M	238	119
240-S2M	240	120
242-S2M	242	121
244-S2M	244	122
246-S2M	246	123
248-S2M	248	124
250-S2M	250	125
252-S2M	252	126
254-S2M	254	127
256-S2M	256	128
258-S2M	258	129
260-S2M	260	130
262-S2M	262	131
264-S2M	264	132
266-S2M	266	133
268-S2M	268	134
270-S2M	270	135
272-S2M	272	136
274-S2M	274	137
276-S2M	276	138
278-S2M	278	139
280-S2M	280	140
284-S2M	284	142
286-S2M	286	143
288-S2M	288	144
290-S2M	290	145
292-S2M	292	146
296-S2M	296	148
300-S2M	300	150
302-S2M	302	151

### 1

#### 152~250 teeth

Code	Belt circumference mm	Number of teeth
304-S2M	304	152
306-S2M	306	153
308-S2M	308	154
310-S2M	310	155
312-S2M	312	156
314-S2M	314	157
316-S2M	316	158
318-S2M	318	159
320-S2M	320	160
322-S2M	322	161
324-S2M	324	162
326-S2M	326	163
328-S2M	328	164
330-S2M	330	165
334-S2M	334	167
338-S2M	338	169
340-S2M	340	170
342-S2M	342	171
344-S2M	344	172
348-S2M	348	174
350-S2M	350	175
354-S2M	354	177
360-S2M	360	180
370-S2M	370	185
372-S2M	372	186
374-S2M	374	187
376-S2M	376	188
380-S2M	380	190
386-S2M	386	193
390-S2M	390	195
396-S2M	396	198
400-S2M	400	200
408-S2M	408	204
410-S2M	410	205
426-S2M	426	213
430-S2M	430	215
434-S2M	434	217
436-S2M	436	218
438-S2M	438	219
440-S2M	440	220
442-S2M	442	221
444-S2M	444	222
448-S2M	448	224
452-S2M	452	226
456-S2M	456	228
460-S2M	460	230
468-S2M	468	234
474-S2M	474	237
480-S2M	480	240
486-S2M	486	243
488-S2M	488	244
494-S2M	494	247
500-S2M	500	250

### 1

#### 260~762 teeth

Code	Belt circumference mm	Number of teeth
520-S2M	520	260
530-S2M	530	265
550-S2M	550	275
560-S2M	560	280
572-S2M	572	286
580-S2M	580	290
586-S2M	586	293
594-S2M	594	297
600-S2M	600	300
604-S2M	604	302
630-S2M	630	315
638-S2M	638	319
640-S2M	640	320
648-S2M	648	324
656-S2M	656	328
660-S2M	660	330
672-S2M	672	336
676-S2M	676	338
694-S2M	694	347
710-S2M	710	355
726-S2M	726	363
740-S2M	740	370
752-S2M	752	376
796-S2M	796	398
800-S2M	800	400
810-S2M	810	405
822-S2M	822	411
826-S2M	826	413
848-S2M	848	424
856-S2M	856	428
862-S2M	862	431
866-S2M	866	433
880-S2M	880	440
882-S2M	882	441
900-S2M	900	450
910-S2M	910	455
930-S2M	930	465
944-S2M	944	472
976-S2M	976	488
984-S2M	984	492
1016-S2M	1016	508
1062-S2M	1062	531
1066-S2M	1066	533
1100-S2M	1100	550
1136-S2M	1136	568
1140-S2M	1140	570
1196-S2M	1196	598
1224-S2M	1224	612
1250-S2M	1250	625
1274-S2M	1274	637
1290-S2M	1290	645
1420-S2M	1420	710
1524-S2M	1524	762