


Hex socket head cap screw

**WA712**



Material	Hardness	Finish	Strength distinction
SCM435 (Alloy steel)	33~38HRC	Black oxide Nickel plated	12.9
SUS304	-	-	A2

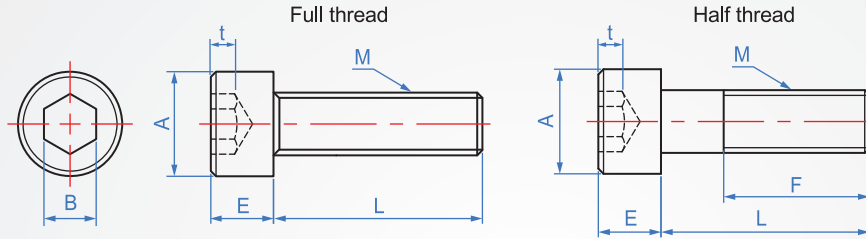

How to order

1  
 2  
 WA712 - M2 - 3 -   
 TYPE M L  
 Material chosen  
 Black oxide.....   
 Nickel plated.....   
 SUS304.....

1															2															Unit : mm	
M	Pitch	L												F	A	B	E	t	PCS/PKG												
M2	0.4	4	5	6	8	10	12	15							全牙	3.8	1.5	2	1	100											
M2.5	0.45	4	5	6	8	10	12	15	16	20	25				全牙	4.5	2	2.5	1.1												
M3	0.5	4	5	6	8	10	12	15	16	20	25	30F	35F	40F			全牙 18	5.5	2.5		3	1.3									
M4	0.7		5	6	8	10	12	15	16	20	25	30	35F	40F	50F	60F	全牙 20	7	3		4	2									
M5	0.8		5	6	8	10	12	15	16	20	25	30	35F	40F	50F	60F	全牙 22	8.5	4		5	2.5									
M6	1.0				8	10	12	15	16	20	25	30	35F	40F	50F	60F	全牙 24	10	5		6	3	100 50								
M8	1.25					10	12	15	16	20	25	30	35	40	50	60	全牙 28	13	6		8	4	100 50								
M10	1.5						12	15	16	20	25	30	35	40	50	60	全牙 32	16	8		10	5	50 30								
M12	1.75									20	25	30	35	40	50	60	全牙 36	18	10		12	6	30 20								

※ Half thread in orange performance.

Units for the package get more preferential.