

Ball roller component

## BR879

TYPE	Main ball	Main part	Auxiliary ball	Distance ring	Wheel frame
HB Hex head screw type	SUS440C HRC55~	SUS304	SUS440C HRC55~	SUS304	A6063 (Clear anodizing)
	Resin ball				
PF Press-in	SUS440C HRC55~	SUS304	SUS440C HRC55~	SUS304	A6063 (Clear anodizing)
	Resin ball				


### How to order

1 2  
 BR879 - HB - 200 -   
 TYPE Type Length  
 Main ball choosen  
 SUS440C.....  SUS  
 POM.....  POM




#### HB : Hex head screw type

▶ Length 200 Roller number : 4

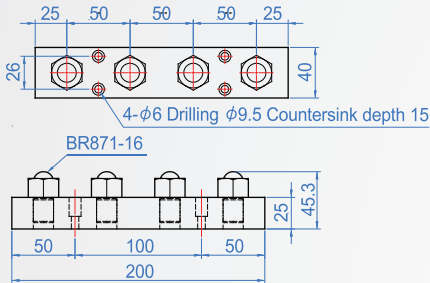


#### PF : Press-in


▶ Length 200 Roller number : 4

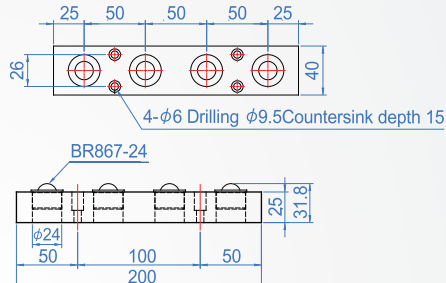


▶ Length 400 Roller number : 8

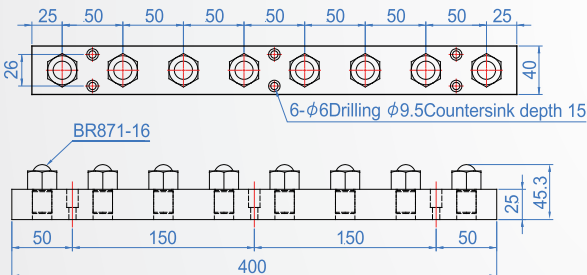


▶ Length 400 Roller number : 8

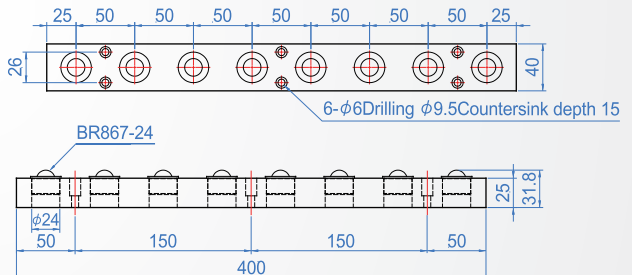


▶ Length 600 Roller number : 12

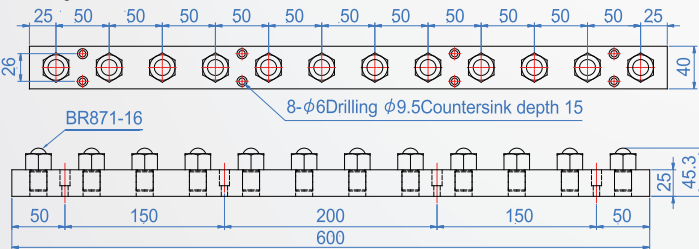

▶ Length 600 Roller number : 12

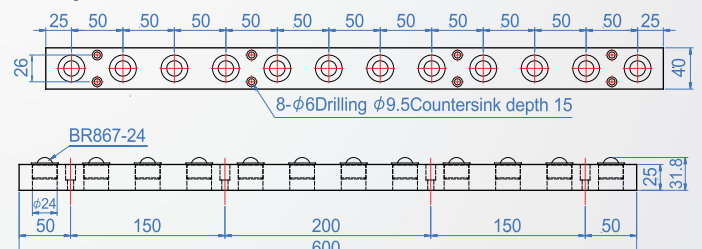

※ Example

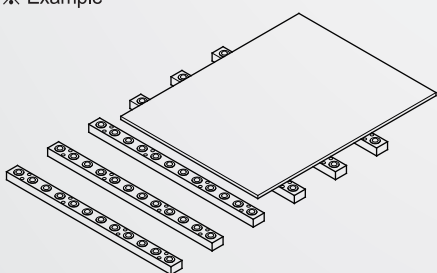

### 2

Unit : mm

Full length No.	Ball roller		
	Type	Specification	Single under load N
200	Hex head screw type	BR871	343
	Hex head screw type	BR871-POM	69
400	Press-in type	BR867	343
	Press-in type	BR867-POM	69

kgf=N×0.101972