


KG-免鍵皮帶輪
5GT
齒距 5mm




本體材質	法蘭	表面處理
A6201	鋁	AS 白色陽極
		AB 黑色陽極
		AK 硬化陽極
		AN 無電解鍍
S45C	鐵	TB 染黑
		TN 無電解鍍

Y 凸型

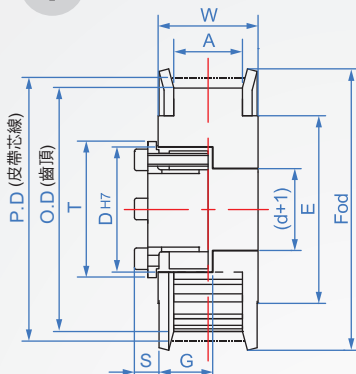

Z 埋入型

當(S+1)+G≧W時底部是貫穿穴。



※軸套需另加購
(請參考LP458系列)



How to order



選擇材質及表面

A6201+白色陽極.....	AS
A6201+黑色陽極.....	AB
A6201+硬化陽極.....	AK
A6201+無電解鍍.....	AN
S45C+染黑.....	TB
S45C+無電解鍍.....	TN

齒數	齒形 寬度	輪形	Y型 適用的軸孔 d徑				Z型 適用的軸孔 d徑			齒數	P.D	O.D	E	Fod					
			10	15	20	25	15	20	25										
20	5GT-10 (A=11 W=16)	凸型 Y	8	8	8	8	-	-	-	20	31.83	30.69	24	35					
22			8~10	8~10	8~10	8~10	8	8	8	22	35.01	33.87	28	40					
24			8~12	8~12	8~12	8~12	8~10	8~10	8~10	24	38.2	37.05	30	42					
25															25	39.79	38.65	45	
26			8~16	8~16	8~16	8~16	8~10	8~10	8~10	26	41.38	40.24	34	47					
28															28	44.56	43.42	37	49
30															30	47.75	46.6	40	52
32															32	50.93	49.79	44	55
34			5GT-15 (A=17 W=22)	Y	8~19	8~19	8~19	8~16	8~16	34	54.11	52.97	44	62					
36															36	57.3	56.15	45	65
38	5GT-20 (A=22 W=27)	埋入型 Z	8~12	10~22	10~22	8~12	10~19	38	60.48	59.34	52.5	67.5							
40													40	63.66	62.52	71			
42													42	66.85	65.70	58	71		
44													44	70.03	68.89	59	73		
46													46	73.21	72.07	60	80		
48													48	76.39	75.25	65	83		
50													50	79.58	78.43	65	85		
60													60	95.49	94.35	80	100		
70													70	111.41	110.27	98	118		
72													72	114.59	113.45	110	135		
80	5GT-25 (A=27 W=32)	Z	10~22	10~30	12~30	10~19	10~25	80	127.32	126.18	110	135							
90													90	143.24	142.1	120	146		
100													100	159.15	158.01	130	165		

※上表中齒數與軸徑尺寸以外的部品，伽納也可以設計並製作。

■LP458軸套尺寸表

單位：mm

d徑	8	10	12	14	15	16	18	20	22	24	25	28	30	32	35	38	40	45	50	55	60	65
D	21	23	26	28	29	30	32	38	40	42	43	46	48	50	57	60	62	67	72	77	82	87
G	15		18				22		23	24		25	27		28			29				
S	6		6.5				8				8.5			10			10.5		11			
T	23.5	25.5	28.5	30.5	31.5	32.5	34.5	42	44	46	47	50	52	54	62	65	67	72	77	83	87	92