
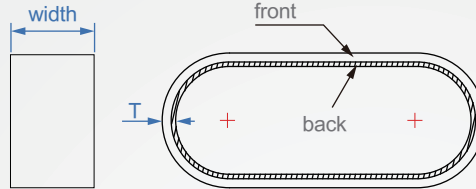


For transportation


OE

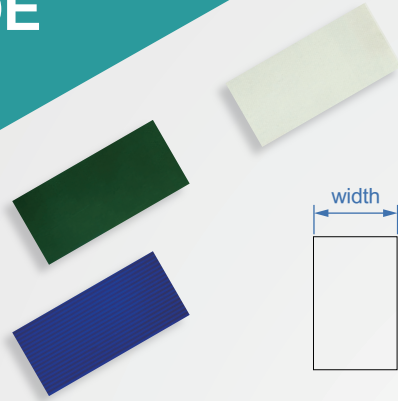

No.	material			material
	front	color	back	
PU	Polyurethane PU	white*	Polyester fiber (White)	general use
PUN	Polyurethane PU(fog)	green		
R	PVC	white*		food grade oil resistant
F		green		Friction-resistant oil-resistant
FS	PVC(soft)	blue	Friction Resistant Straight Grain	

White* is widely used in the food market.

How to order



No.	T	Perimeter mm	Width	Applicable roller Minimum diameter	weight kg/m ²	When stretched by 1% kg/cm	Maximum tension kg/cm	Breaking strength kg/cm	FDA test	antistatic test	unit : mm
											Operating temperature °C
PU	0.7	500	5	10~	0.9	6	16	160	✓	✓	-40 ~ 100°C
PUN	1.7			15~	14	17	30	240	✓	✓	-20 ~ 100°C
	R	1.4	50000	600	12~	0.9	6	12	120	✓	—
1-R		12~			1	6	12	120	—	✓	-15 ~ 90°C
F	1-F	50000	600	25~	2.3	8	11	220	—	✓	-5 ~ 80°C
	2			40~	2.7	10	20	200	—	✓	-15 ~ 90°C
FS	2.8	50000	600	40~	2.7	10	20	160	—	✓	-25 ~ 90°C
	2.7			40~	2.7	10	20	160	—	✓	-25 ~ 90°C

* There are also products other than production specifications.