




Pitch : 5.0mm

## AT5

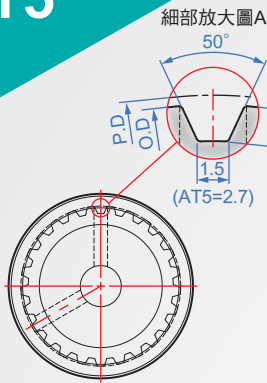

皮帶寬度	10	15	20	25
共通尺寸	A=11 W=16 L=28	A=17 W=22 L=34	A=22 W=27 L=39	A=27 W=32 L=44

材質：鋁A6061+陽極處理。  
(如需鐵材質請電洽加納窗口。)

### How to order

1 齒數 2 TYPE 寬度 3 外形 4 孔形 軸徑

30 - AT5-10 - BF - H10 -

選擇表面處理

- AS.....白色陽極
- AB.....黑色陽極
- AN.....無電解鍍
- AK.....硬化陽極

BF形可指定D變更  
例：原D徑33，變更32..... D32

齒數	TYPE 寬度	外形	孔形	軸孔d 加工最小值	P.D	O.D	齒數	D	E	Fod
12					19.10	17.85	12	-	14.5	22.6
13					20.69	-	13	-	14.5	22.6
14					22.28	21.05	14	14	16	26
15					23.87	22.65	15	15	18	28
16					25.46	24.20	16	17	20	32
17					27.06	25.80	17	16	22.5	32
18					28.65	27.40	18	19	24	35
19					30.24	29.00	19	22	26	36
20					31.83	30.60	20	24	28	40
21					33.42	32.20	21	26	30	42
22					35.01	33.75	22	27	30	45
23					36.61	35.35	23	31	34	47
24					38.20	36.95	24	32	37	49
25					39.79	38.55	25	33	40	52
26	AT5-10	AF	H 圓孔		41.38	40.15	26	37	44	62
27					42.97	41.75	27	40	45	65
28					44.56	43.35	28	44	52.5	67.5
29					46.15	44.90	29	47	58	71
30	AT5-15	BF	圓孔+攻牙		47.75	46.50	30	48	58	71
31					49.34	48.10	31	50	59	73
32					50.93	49.70	32	55	60	80
33					52.52	51.30	33	60	65	83
34					54.11	52.90	34	63	65	85
35					55.70	54.45	35	75	80	100
36	AT5-20				57.30	56.05	36	80	98	118
37					58.89	57.65	37	90	110	135
38					60.48	59.25	38	100	120	146
39					62.07	60.85	39	100	130	165
40	AT5-25		鍵槽+攻牙		63.66	62.45	40			
41					65.25	64.00	41			
42					66.85	65.60	42			
43					68.44	67.20	43			
44					70.03	68.80	44			
45					71.62	70.40	45			
46					73.21	72.00	46			
47					74.80	73.55	47			
48					76.39	75.15	48			
49					77.99	76.75	49			
50					79.58	78.35	50			
60					95.49	94.25	60			
70					111.41	110.20	70			
72					114.59	113.35	72			
80					127.32	126.10	80			
90					143.24	142.05	90			
100					159.15	157.95	100			

版權所有 重製必究