


推力軸承
小型

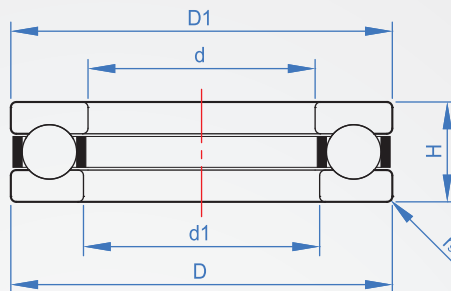

內、外輪	精度
鋼 SUJ2	JIS 0級

※軌道附溝槽

How to order ▶

1
F4-9M
|
型號

版權所有
重製必究

型號	內圈外徑 d	外圈外徑 D	內圈外徑 d1	外圈外徑 D1	倒角 rs (min)	高度 H	額定載荷		最大允許回轉數 (x1000rpm)		鋼球		重量 (參考)
							Ca(N)	Coa(N)	Grease	Oil	個數	直徑	
F3-8M	3	8	3.2	7.8	0.15	3.5	993	590	19	28	6	1.588	0.9
F4-9M	4	9	4.2	8.8	0.15	4	944	640	17	25	6	1.588	1.2
F4-10M	4	10	4.2	9.8	0.15	4	925	661	16	24	6	1.588	1.5
F5-12M	5	12	5.2	11.8	0.2	4	1056	942	14	22	8	1.588	2.1
F6-12M	6	12	6.2	11.8	0.2	4.5	1819	1588	14	20	9	2	2.2
F6-14M	6	14	6.25	13.8	0.2	5	2155	1701	12	18	7	2.381	3.5
F7-13M	7	13	7.2	12.8	0.2	4.5	1767	1645	13	20	9	2	2.6
F7-17M	7	17	7.2	16.8	0.3	6	3086	2675	10	15	8	2.778	6.5
F8-16M	8	16	8.2	15.8	0.3	5	3917	3394	11	17	9	3	4.5
F8-19M	8	19	8.2	18.8	0.3	7	3939	3476	9	13	8	3.175	9.1
F9-20M	9	20	9.2	19.8	0.3	7	3855	3571	8	13	8	3.175	9.9
F10-18M	10	18	10.2	17.8	0.3	5.5	2470	2721	10	15	10	2.381	5.4