


# 6

## 彈簧銷



Spring Plunger

SUS體+樹脂銷  
**PP633**

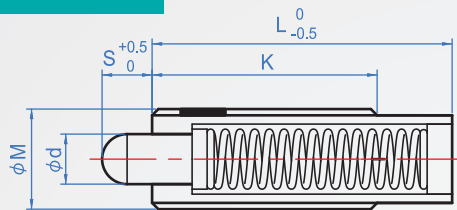


| Type   | 本體材質     | 銷          | 使用可能溫度     |
|--------|----------|------------|------------|
| 輕荷重 L  | SUS304相當 | 工程塑膠 (POM) | -30°C~80°C |
| 重荷重 H  |          |            |            |
| 極重荷重 X |          |            |            |

彈簧：SUS631



### How to order



版權所有  
重製必究

| M<br>粗螺紋 | S   | B   | d   | K  | L  | 荷重 (N) |      |        |      |         |      | 適用<br>扳手 |     |     |
|----------|-----|-----|-----|----|----|--------|------|--------|------|---------|------|----------|-----|-----|
|          |     |     |     |    |    | 輕荷重用 L |      | 重荷重用 H |      | 極重荷重用 X |      |          |     |     |
|          |     |     |     |    |    | min.   | max. | min.   | max. | min.    | max. |          |     |     |
| M3       | 1.5 | 0.9 | 1.1 | 15 | 15 | 0.4    | 1.3  | 0.8    | 2.94 | 1.1     | 3.42 | 一字起子     |     |     |
|          | 3   |     |     | 15 | 15 | 0.2    | 1.3  | 0.6    | 2.93 | 0.8     | 3.41 |          |     |     |
| M4       | 2   | 1.3 | 1.6 | 15 | 15 | 0.9    | 2.0  | 2.0    | 8.8  | 6.1     | 13.8 |          | P-1 |     |
|          | 4   |     |     | 24 | 24 | 0.6    | 2.1  | 1.9    | 8.75 | 5.8     | 13.6 |          |     |     |
| M5       | 3   | 1.5 | 2.0 | 20 | 20 | 1.4    | 9.7  | 2.7    | 16.3 | 6.8     | 22.0 |          |     | P-2 |
|          | 5   |     |     | 27 | 27 | 1.1    | 10.3 | 1.0    | 17.1 | 5.7     | 21.5 |          |     |     |
| M6       | 3   | 2   | 2.5 | 25 | 25 | 6.0    | 9.8  | 8.0    | 26.4 | 15.8    | 35.6 | P-3      |     |     |
|          | 5   |     |     | 30 | 30 | 3.4    | 9.86 | 4.4    | 26.6 | 12.9    | 34.4 |          |     |     |
| M8       | 3   | 2.5 | 3.1 | 25 | 25 | 6.0    | 9.9  | 14.7   | 27.0 | 21.9    | 36.3 |          | P-4 |     |
|          | 5   |     |     | 27 | 27 | 4.0    | 9.83 | 6.7    | 26.6 | 14.7    | 34.5 |          |     |     |
| M10      | 5   | 3   | 3.8 | 30 | 30 | 5.7    | 14.7 | 8.2    | 45.7 | 24.5    | 58.6 |          |     | P-4 |
|          | 10  |     |     | 30 | 43 | 4.4    | 14.7 | 6.2    | 45.1 | 19.8    | 58.7 |          |     |     |
| M12      | 5   | 4   | 5.5 | 30 | 30 | 5.8    | 14.7 | 18.2   | 49   | 34.9    | 63.6 | P-4      |     |     |
|          | 10  |     |     | 35 | 43 | 5.0    | 14.7 | 8.2    | 49.1 | 25.5    | 63.6 |          |     |     |
| M16      | 15  | 5   | 8.0 | 35 | 51 | 6.9    | 14.7 | 7.5    | 48.9 | 20.1    | 63.7 |          | P-4 |     |
|          | 10  |     |     | 35 | 57 | 9.2    | 34.2 | 18.9   | 68.5 | 38.7    | 88.4 |          |     |     |
|          | 15  |     |     | 35 | 57 | 8.6    | 34.4 | 14.4   | 68.6 | 33.9    | 88.1 |          |     |     |
|          | 20  |     |     | 35 | 65 | 7.1    | 34.4 | 4.2    | 68.6 | 25.4    | 88.1 |          |     |     |

荷重N×0.101972=荷重(kgf)

Che Na

(FAX) (02)2688-3177

info@chena.com.tw

(02)2688-3188  
(02)2688-3881~3

新北市樹林區光榮街21號