


6

彈簧銷


Spring Plunger

全SUS PP632

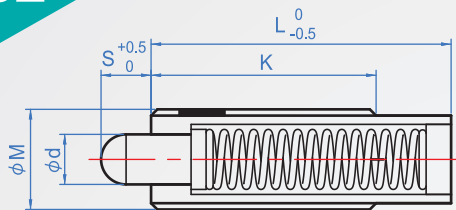


Type	本體材質	銷		使用可能溫度
		材質	硬度	
輕荷重 L	SUS304相當	SUS440C	55HRC~	-30°C~260°C
重荷重 H				
極重荷重 X				

彈簧：SUS631



How to order



單位：mm

M 粗螺紋	S	B	d	K	L	荷重 (N)						適用 扳手
						輕荷重用 L		重荷重用 H		極重荷重用 X		
						min.	max.	min.	max.	min.	max.	
M3	1.5	0.9	1.1	15	15	0.4	1.3	0.8	2.94	1.1	3.42	一字起子
	3					0.2	1.3	0.6	2.93	0.8	3.41	
M4	2	1.3	1.6	15	15	0.9	2.0	2.0	8.8	6.1	13.8	P-1
	4					0.6	2.1	1.9	8.75	5.8	13.6	
M5	3	1.5	2.0	20	20	1.4	9.7	2.7	16.3	6.8	22.0	P-2
	5					1.1	10.3	1.0	17.1	5.7	21.5	
M6	3	2	2.5	25	25	6.0	9.8	8.0	26.4	15.8	35.6	P-3
	5					3.4	9.86	4.4	26.6	12.9	34.4	
M8	3	2.5	3.1	25	25	6.0	9.9	14.7	27.0	21.9	36.3	P-4
	5					4.0	9.83	6.7	26.6	14.7	34.5	
M10	5	3	3.8	30	30	5.7	14.7	8.2	45.7	24.5	58.6	P-1
	10					4.4	14.7	6.2	45.1	19.8	58.7	
M12	5	4	5.5	30	30	5.8	14.7	18.2	49	34.9	63.6	P-2
	10					5.0	14.7	8.2	49.1	25.5	63.6	
	15					6.9	14.7	7.5	48.9	20.1	63.7	
M16	10	5	8.0	35	57	9.2	34.2	18.9	68.5	38.7	88.4	P-3
	15					8.6	34.4	14.4	68.6	33.9	88.1	
	20					7.1	34.4	4.2	68.6	25.4	88.1	

荷重N×0.101972=荷重(kgf)

Che Na

(FAX) (02)2688-3177

info@chena.com.tw

(02)2688-3188
(02)2688-3881~3

新北市樹林區光榮街21號

版權所有
重製必究