


樹脂銷


PP631

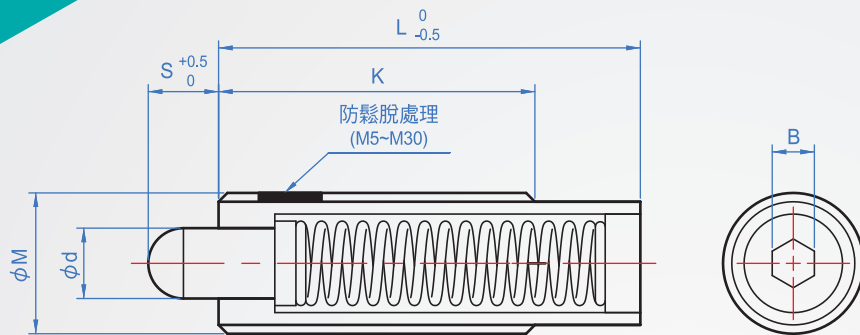

荷重代碼	本體		銷
	材質	表面處理	
輕荷重 L	S45C HRC29~35	染黑	POM 工程塑膠
重荷重 H		鍍銀	
極重荷重 X			

彈簧：SWP-B / 使用溫度：-30°C~80°C

How to order



適用扳手詳下方 單位：mm

M 粗螺紋	S	B	d	輕、重荷重		極重荷重		荷重 (N)						適用 扳手
				K	L	K	L	輕荷重用 L		重荷重用 H		極重荷重用 X		
								min.	max.	min.	max.	min.	max.	
M3	1.5	0.9	1.1	10	10	15	15	0.49	1.0	0.78	2.9	2.2	4.5	一字起子
	3			15	15	20	20	0.29	1.0	0.78	2.9	1.8	4.5	
M4	2	1.3	1.6	15	15	24	24	1.0	2.0	2.9	8.8	5.2	13	一字起子
	4			24	24	24	24	0.59	2.0	2.0	8.8	5.2	13	
M5	3	1.5	2.0	20	20	27	27	2	9.8	4.9	19.6	9.1	24.5	P-1
	5			27	27	39	39	2	9.8	2.9	19.6	8.8	24.5	
M6	3	2	2.5	25	25	30	30	5.9	9.8	7.8	29.4	14.2	39.5	P-1
	5			30	30	36	36	2	9.8	4.9	29.4	14.1	39.4	
M8	3	2.5	3.1	25	25	27	27	5.9	9.8	14.7	29.4	35.3	41.2	P-2
	5			27	27	30	35	2.9	9.8	7.8	29.4	14.7	41.2	
M10	5	3	3.8	30	30	30	35	5.9	14.7	8.8	49.0	15.7	62.8	P-2
	10			30	43	30	53	2.9	14.7	7.8	49.0	12.7	62.8	
M12	5	4	5.5	30	30	35	43	5.9	14.7	18.6	49.0	37.2	98.1	P-3
	10			35	43	35	58	2.9	19.6	7.8	49.0	14.7	98.1	
	15			35	51	35	78	2.9	19.6	4.9	49.0	14.9	98.1	
M16	10	5	8	35	60	35	60	5.9	39.2	12.7	78.5	23.5	147.2	P-4
	15			35	60	35	70	3.9	39.2	12.7	78.5	21.6	147.2	
	20			35	85	35	90	4.9	39.2	9.8	78.5	12.7	147.2	
	30			35	125	35	125	2.9	39.2	6.9	78.5	—	—	

M3、M4無防鬆脫處理

荷重N×0.101972=荷重(kgf)

Che Na

(FAX) (02)2688-3177

info@chena.com.tw

(02)2688-3188
(02)2688-3881~3

新北市樹林區光榮街21號

版權所有 重製必究