

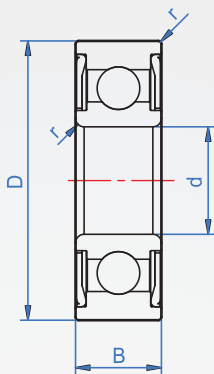


深溝滾珠
軸承

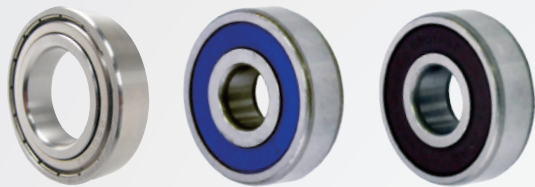

材質 軸承精度

鋼
不鏽鋼

JIS 0級

How to order ▶▶

Code No. 密封方式

選擇材質
鋼.....空白
不鏽鋼.....SS

選擇產地
日本.....JP
台灣.....TW
指定品牌.....

版權所有重製必究

Code No.	密封方式	主要尺寸(mm)				基本額定(N)		極限轉速 (rpm) 脂潤滑	安裝尺寸(mm)			質量 參考 (g)					
		d	D	B	r (min)	動負荷 Cr	靜負荷 Cor		da (min.)	Da (max.)	R (max.)						
6800	ZZ (防塵蓋)	10	19	5		1830	925	32000	12	12	17		5				
6900			22	6	0.3	2700	1270	30000		12.5	20	0.3	9				
6000			26	8		4550	1960	29000		13	24		19				
6200			30	9		5100	2390	25000		16	25		32				
6300			35	11	0.6	8200	3500	23000		16.5	30	0.6	53				
6801		2RS (塑膠蓋)	12	21	5		1920	1040	29000	14	14	19		6			
6901				24	6	0.3	2890	1460	27000		14	22	0.3	11			
6001				28	8		5100	2390	26000		15	26		23			
6201				32	10	0.6	6100	2750	22000		16	17	27	0.6	37		
6301				37	12	1.0	9700	4200	20000		18	31	1.0	60			
6802			ZZ (防塵蓋)	15	24	5		2080	1260	26000	17	17	22		7		
6902					28	7	0.3	4100	2060	24000		17	26	0.3	16		
6002					32	9		5600	2840	22000		19	30		32		
6202					35	11	0.6	7750	3600	19000		20	20	30	0.6	45	
6302					42	13	1.0	11400	5450	17000		21	22.5	36	1.0	82	
6803				2RS (塑膠蓋)	17	26	5		2810	1720	24000	19	19	24		8	
6903						30	7	0.3	4650	2580	22000		20	28	0.3	18	
6003						35	10		6800	3350	20000		21	33		39	
6203						40	12	0.6	9600	4600	18000		22	23	35	0.6	65
6303						47	14	1.0	13500	6550	16000		23	25	41	1.0	115
6804	ZZ (防塵蓋)				20	32	7		4000	2470	21000	22	22	30		19	
6904						37	9	0.3	6400	3700	19000		24	24	35	0.3	36
6004						42	12	0.6	9400	5050	18000		25	25.5	38	0.6	70
6204						47	14	1.0	12800	6650	16000		26	26.5	41	1.0	106
6304						52	15	1.1	15900	7900	14000		28	28	45	1.1	144
6805		2RS (塑膠蓋)			25	37	7		4300	2950	18000	27	27	35		22	
6905						42	9	0.3	7050	4550	16000		28.5	40	0.3	42	
6005						47	12	0.6	10100	5850	15000		29	30	43	0.6	79
6205						52	15	1.0	14000	7850	13000		31	32	46	1.0	128
6305						62	17	1.1	21200	10900	12000		35	35	55	1.1	232
6806			ZZ (防塵蓋)		30	42	7		4700	3650	15000	32	32	40		26	
6906						47	9	0.3	7250	5000	14000		34	45	0.3	45	
6006						55	13		13200	8300	13000		35	36.5	50		117
6206						62	16	1.0	19500	11300	11000		36	38	56	1.0	199
6306						72	19	1.1	26700	15000	10000		42	42	65	1.1	346
6807				2RS (塑膠蓋)	35	47	7		4900	4050	13000	37	37	45		29	
6907						55	10	0.6	11200	7450	12000		39	39	51	0.6	73
6007						62	14	1.0	16000	10300	12000		40	41	57	1.0	156
6207						72	17	1.1	25700	15300	9800		42	44	65	1.1	288
6307						80	21	1.5	33500	19100	8800		44	46	71	1.5	457
6808	ZZ (防塵蓋)				40	52	7		5100	4400	12000	42	42	50		33	
6908						62	12	0.6	14600	10200	11000		44	46	58	0.6	110
6008						68	15	1.0	16800	11500	10000		45	47	63	1.0	190
6208						80	18	1.1	29100	17800	8700		47	50	73	1.1	366
6308						90	23	1.5	40500	24000	7800		49	53	81	1.5	630
6809		2RS (塑膠蓋)			45	58	7		6400	5650	11000	47	47.5	56		40	
6909						68	12	0.6	15100	11200	9800		49	50	64	0.6	128
6009						75	16	1.0	21000	15100	9200		50	53	70	1.0	237
6209						85	19	1.1	32500	20400	7800		52	55	78	1.1	398
6309						100	25	1.5	53000	32000	7000		54	61	91	1.5	812
6810			ZZ (防塵蓋)		50	65	7		6600	61000	9600	52	52.5	63		52	
6910						72	12	0.6	15600	12200	8900		54	55	68	0.6	132
6010						80	16	1.0	21800	16600	8400		55	58	75	1.0	261
6210						90	20	1.1	35000	23200	7100		57	60	83	1.1	454
6310						110	27	2.0	62000	38500	6400		60	68	100	2.0	970

※接觸式比非接觸式防塵性、防水性佳~但高速時溫度容易升高。

1N=0.102kgf