



嵌入精密定位  
**IP638**  
螺牙短型



A 回復型

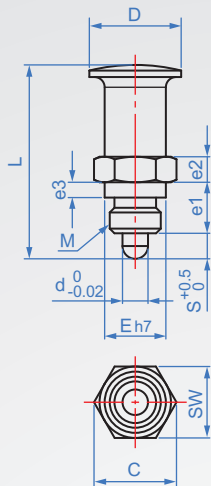

B 卡鎖型

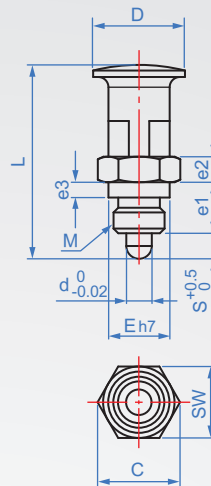

本體	銷	彈簧	旋鈕
鋼材 (染黑)	鋼材 HRC50~	SWP-B	鋁合金

How to order



單位: mm

型式	M	Pitch	d <sub>-0.02</sub> <sup>0</sup>	E	S	L	D	e1	e2	e3	SW	C	荷重(N)		
													min.	max.	
A 回復型	M10	1.5	5	12	0	5	38	18	10	5	3	14	16	4.5	7.3
	M12	1.75	6	14	-0.018	6	46	20	12	6		17	20	5.3	8.8
B 卡鎖型	M16	2	8	18	0	8	57	26	16	4	22	25	5.7	10	
	M20	2.5	10	22	-0.02	10	70	32	20		10	27	31	6.6	15