

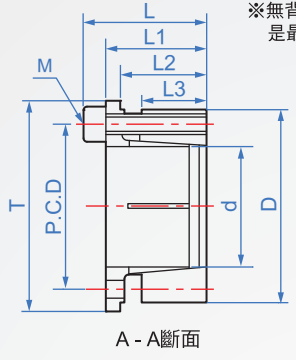


法蘭型 LP458



※不會發生用鍵槽加工產生搖晃鬆脫的問題，能有效使用於反覆回轉的機構上。
 ※無背隙、無軸向移動、高同心度〈可自動校心〉，標準型是最廣泛被使用的緊固軸套。

安裝範例：



建議軸外徑公差	軸面粗度
h7	1.6a 以下(Ra)
建議環套內徑公差	環套面粗度
H7	3.2a 以下(Ra)

材質	表面處理
S45C	-
	染黑
	無電解鍍

How to order



單位：mm

d	D	T	P.C.D	L	L1	L2	L3	緊固螺栓		表面壓力 Mpa	容許扭距 (N.m)	軸向推力 N × 10 ³	質量 g								
								M × L	支												
8	21	23.5	15.5	20.5	16.5	14.5	10	M4 × 12	3	3.9	80	31.4	5.96	30							
10	23	25.5	17.5																		
11	24	26.5	18.5																		
12	26	28.5	20																		
14	28	30.5	22	24	20	17.5	12	M4 × 14	6		95	50.3	7.94	50							
15	29	31.5	23																		
16	30	32.5	24																		
17	31	33.5	25																		
18	32	34.5	26								97	113	11.9	75							
19	33	35.5	27																		
20	38	42	30.8	29.1	24.1	21.1	15.3	M5 × 18	8	8.8	130	216	21.6	144							
22	40	44	32.8																		
24	42	46	34.8																		
25	43	47	35.8																		
28	46	50	38.8								31.6	26.6	23.1	17.3	10	11.9	441	31.4	195		
30	48	52	40.8																		
32	50	54	42.8								32.6	27.6	24.1	18.3	M6 × 20	10	15.7	114	500	33.3	208
35	57	62	48.8																		
38	60	65	51.4																		
40	62	67	53.4																		
42	64	69	55.4	37	31	27	20.5	12	11.9	1157								51.5	405		
45	67	72	58.4																		
48	70	75	61.4	38.5	32.5	28	21.5	M8 × 25	14	37.3								129	1402	58.4	460
50	72	77	63.4																		
55	77	83	68.4																		
60	82	87	73.4																		
65	87	92	78.4								39.5	33.5	28.5	22	15	11.9	2236	68.7	610		
70	97	103	86.2																		
75	102	108	91.2								44.1	36.1	31.5	24	M8 × 25	15	37.3	169	3285	93.2	845
80	107	113	96.2																		
85	112	118	101.2																		
											45.1	37.1	32.1	25				151	4521	106	1270

版權所有 重製必究