


壓入式

## ZC608

英制

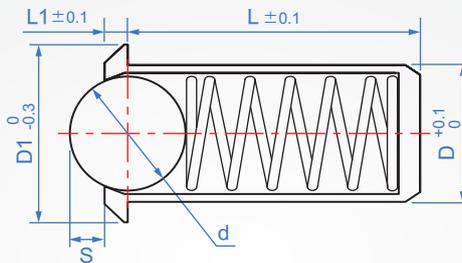

本體	珠子	
	材質	硬度
	SUS303	SUS440C 55HRC~
	POM	-

彈簧:SUS631J1

### How to order



版權所有  
重製必究

D	彈力 N	L	D1	S	d	L1	彈力(N)			
							1H		2H	
							min.	max.	min.	max.
0.125	1H 2H	0.252	0.187	0.035	0.094	0.032	1.8	5.9	3.4	12
0.188		0.394	0.25	0.058	0.156	0.04	4.5	11.3	9	22
0.25		0.471	0.312	0.07	0.187	0.045	6.8	15.8	13.5	30
0.312		0.643	0.375	0.09	0.25		9	22.5	18	45
0.375		0.786	0.5	0.11	0.312	0.078	11.3	31.5	22.5	62
0.5		1.1	0.688	0.161	0.437	0.11	18	40.5	36	80

單位:inch  
kgf=NX0.101972