
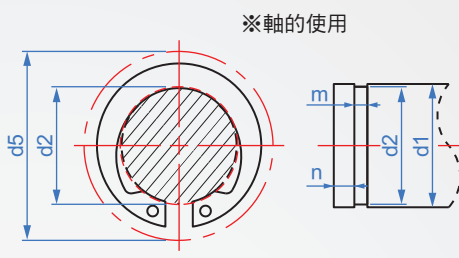




軸用-C形扣環
WA702
ISTW



※軸的使用

d5: 當扣環置入d1時的最小徑。

材質	硬度	表面處理
彈簧用鋼	HRC 44~52	染黑 (CAP)

How to order

WA702 - 6
TYPE No.

單位: mm

No.	d3	公差	(d4)	t	公差	b	d0	公差	d5	適用軸(參考)					
										d1	d2	公差	m	公差	n最小
6	5.6	+0.1 -0.2	8	0.5	±0.03	1.2	2.2	±0.2	8.9	6	5.7	0	0.6	+0.1 +0	1.5
7	6.5		9.3	0.6	±0.04	1.4	2.6		10.3	7	6.7	0	0.7		1.5
8	7.4		10.6	0.7		1.6	3		11.7	8	7.6	0	0.8		1.5
10	9.3	±0.15	13.3	1	±0.05	2	1.2	±0.3	14.5	10	9.6	0	1.15	-0 -0.11	1.5
11	10.2		14.4	1		2.1	1.2		16	11	10.5	1.15	1.5		
12	11.1		15.5	1		2.2	1.2		17.2	12	11.5	1.15	1.5		
13	12	±0.18	16.6	1	±0.06	2.3	1.2	±0.4	18.4	13	12.4	-0 -0.21	1.15	+0.14 +0	1.5
14	12.9		17.5	1		2.3	1.2		19.4	14	13.4		1.15		1.5
15	13.8		18.6	1		2.4	1.2		20.6	15	14.3		1.15		1.5
16	14.7		19.7	1		2.5	1.2		21.8	16	15.2		1.15		1.5
17	15.7		20.9	1		2.6	1.2		23	17	16.2		1.15		1.5
18	16.5		21.9	1.2		2.7	1.5		24.2	18	17		1.35		1.5
19	17.5		23.1	1.2		2.8	1.5		25.2	19	18		1.35		1.5
20	18.5	±0.2	24.4	1.2	±0.07	2.9	1.5	±0.5	27	20	19	-0 -0.25	1.35	+0.14 +0	1.5
21	19.5		25.5	1.2		3	1.5		28	21	20		1.35		1.5
22	20.5		26.5	1.2		3	1.5		29	22	21		1.35		1.5
24	22.2	±0.25	28.6	1.2	±0.08	3.2	1.5	±0.7	31.5	24	22.9	-0 -0.3	1.35	+0.14 +0	1.7
25	23.2		29.8	1.2		3.3	1.5		55	25	23.9		1.35		1.7
26	24.2		31	1.2		3.4	1.5		34	26	24.9		1.35		1.7
28	25.9		33.1	1.5		3.6	1.8		36.5	28	26.6		1.65		2.1
30	27.9	±0.4	35.3	1.5	±0.09	3.7	1.8	±0.8	38.5	30	28.6	-0 -0.3	1.65	+0.14 +0	2.1
32	29.6		37.4	1.5		3.9	1.8		41	32	30.3		1.65		2.6
34	31.5		39.7	1.5		4.1	1.8		43.5	34	32.3		1.65		2.6
35	32.5	±0.5	40.6	1.5	±0.10	4.2	1.8	±0.9	45	35	33	-0 -0.3	1.65	+0.14 +0	3
36	33.2		41.6	1.75		4.2	2		46	36	34		1.9		3
38	35.2		44	1.75		4.4	2		48	38	36		1.9		3
40	37	±0.4	46.2	1.75	±0.11	4.6	2	±1.0	51	40	38	-0 -0.3	1.9	+0.14 +0	3
42	38.5		48.1	1.75		4.8	2		54	42	39.5		1.9		3.8
45	41.5		51.3	1.75		4.9	2		57	45	42.5		1.9		3.8
48	44.5		55.1	1.75		5.3	2		61	48	45.5		1.9		3.8
50	45.8	±0.45	56.8	2	±0.12	5.5	2.5	±1.1	63	50	47	-0 -0.3	2.2	+0.14 +0	4.5
52	47.8		59	2		5.6	2.5		65	52	49		2.2		4.5
55	50.8		62.6	2		5.9	2.5		69	55	52		2.2		4.5
58	53.8	±0.5	66	2	±0.13	6.1	2.5	±1.2	72	58	55	-0 -0.3	2.2	+0.14 +0	4.5
60	55.8		68.4	2		6.3	2.5		75	60	57		2.2		4.5
62	57.8		70.8	2		6.5	2.5		77	62	59		2.2		4.5
63	58.8		72	2		6.6	2.5		78	63	60		2.2		4.5
65	60.8	±0.45	74.4	2.5	±0.14	6.8	3	±1.3	81	65	62	-0 -0.3	2.7	+0.14 +0	4.5
68	63.5		77.5	2.5		7	3		84	68	65		2.7		4.5
70	65.5		79.9	2.5		7.2	3		87	70	67		2.7		4.5
75	70.5	±0.5	85.7	2.5	±0.15	7.6	3	±1.4	92	75	72	-0 -0.3	2.7	+0.14 +0	4.5
80	74.5		90.5	2.5		8	3		98	80	76.5		2.7		5.3

※資料不及備載，其餘尺寸請洽伽納各窗口。

版權所有 重製必究