


## 兩側軸承型 BH557




外型	材質	表面處理	軸承
F 圓形	SUS303	-	SUS
	鋁A6061	AS 白色陽極 AB 黑色陽極	SUJ2
H 二平面形	SUS303	-	SUS
	鋁A6061	AS 白色陽極 AB 黑色陽極	SUJ2

※軸承精度: JIS 0級

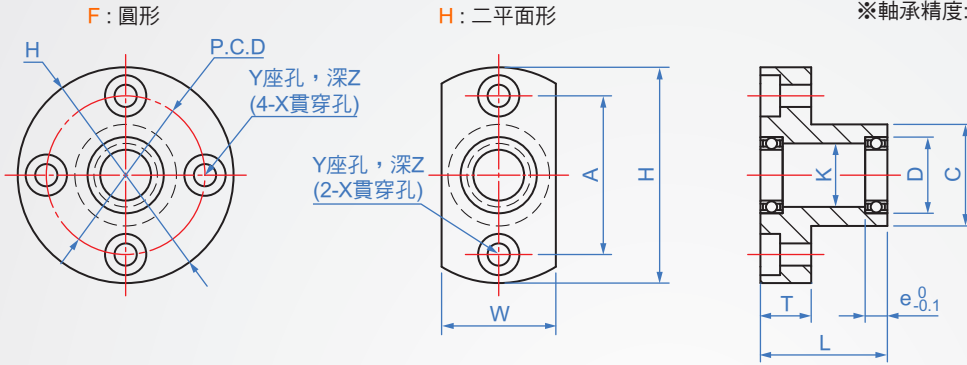

### How to order

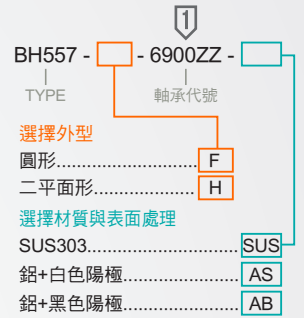

單位: mm

軸承代號	d	DH7	容許公差	L	T	H	e	W	P.C.D	Cg7	容許公差	K	A	X	Y	Z		
606ZZ	6	17	+0.018 0	20	8	39	6	23	29	21	-0.007 -0.028	13	29	4.5	8	4.1		
626ZZ		19	+0.021 0	25		41	6	25	31	24	15	31						
678ZZ	8	12	+0.018 0	20	8	34	3.5	18	25	16	-0.006 -0.024	10	25	3.5	6.5	3.1		
698ZZ		19	+0.021 0	25		41	6	25	31	24	-0.007 -0.028	15	31	4.5	8	4.1		
608ZZ		22				45	7	29	35	27		18	35					
628ZZ		24				47	8	32	37	30		20	37					
6700ZZ	10	15	+0.018 0	20	8	37	4	22	27	19		-0.009 -0.034	12				27	4.5
6800ZZ		19	+0.021 0			25	41	5	25	31	24		15	31				
6900ZZ		22		+0.021 0			25	45	6	29	35		27	19	35			
6000ZZ		26	+0.021 0			25		50	8	34	40		32	-0.009 -0.034	22	40	4.5	
6200ZZ	30	+0.018 0		20	54		9	38	44	36	24	44						
6701ZZ	12		18		+0.018 0	25	8	40	4	25	30	23	-0.007 -0.028	15	30	4.5	8	4.1
6801ZZ		21	+0.021 0	25	44			5	29	34	26	17		34				
6901ZZ		24			48			6	31	38	30	21		38				
6001ZZ		28			52			8	36	42	34	-0.009 -0.034		24	42			
6201ZZ	32	+0.025 0	30	56	10	40	46	38	26	46								
6702ZZ	15	21	+0.021 0	25	10	44	4	29	34	26	-0.007 -0.028	18	34	5.5	9.5	5.1		
6802ZZ		24				47	5	32	37	30		20	37					
6902ZZ		28				57	7	37	45	35		-0.009 -0.034	25				45	
6002ZZ		32	+0.025 0	30		60	9	40	48	38			28				48	
6202ZZ	35	+0.021 0	30	10	64	11	44	52	42	-0.009 -0.034	29	52	4.5	8	4.1			
6803ZZ	26				50	5	34	40	32		22	40				4.5	8	4.1
6903ZZ	30				60	7	38	48	36		27	48				5.5	9.5	5.1
6003ZZ	35	+0.025 0	35	66	10	44	54	42	31	54								
6203ZZ	40	+0.025 0	40	10	72	12	50	60	48	-0.009 -0.034	34	60	4.5	8	4.1			