



孔用-C形扣環
WA700
IRTW

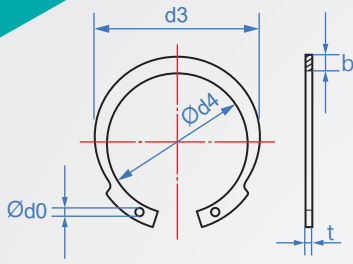

尺寸No.12以下

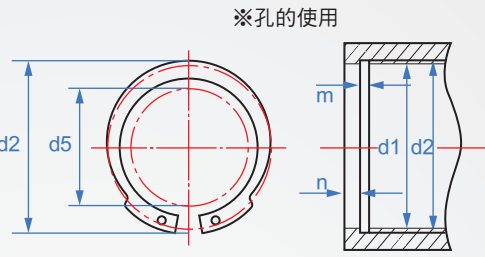

d5: 當扣環置入d1時的最小直徑。

材質	硬度	表面處理
彈簧用鋼	HRC 44~52	染黑 (CAP)

How to order

WA700 - 10
TYPE No.

單位: mm

No.	d3	公差	(d4)	t	公差	b	d0	公差	d5	適用孔(參考)				
										d1	d2	公差	m	n最小
10	11.1	±0.18	7.7	1	±0.05	1.7	0.9	±0.3	5.9	10	10.4	+0.11 0	1.15	1.5
11	12.2		8.6			1.8			6.6	11	11.4			
12	13.3		9.7			1.8			7.6	12	12.5			
13	14.1		10.9			1.6			9	13	13.6			
14	15.1		11.7			1.7			9.8	14	14.6			
15	16.2		12.6			1.8			10.6	15	15.7			
16	17.3		13.5			1.9			11.4	16	16.8			
17	18.3		14.3			2			12.2	17	17.8			
18	19.5		15.3			2.1			13	18	19			
19	20.5		16.1			2.2			13.8	19	20			
20	21.5	16.9	2.3	14.5	20	21								
21	22.5	±0.2	17.7	1.2	±0.06	2.4	1.2	±0.4	15	21	22	+0.21 0	1.35	1.8
22	23.5		18.7			2.4			16	22	23			
24	25.9		20.7			2.6			17.5	24	25.2			
25	26.9		21.5			2.7			18.5	25	26.2			
26	27.9		22.3			2.8			19	26	27.2			
28	30.1		24.1			3			20.5	28	29.4			
30	32.1		25.7			3.2			22.5	30	31.4			
32	34.4		27.4			3.5			23.5	32	33.7			
34	36.5	±0.25	29.1	1.5	±0.06	3.7	1.6	±0.4	25	34	35.7	+0.25 0	1.65	+0.14 0
35	37.8		30			3.9			26	35	37			
36	38.8		30.8			4			26.5	36	38			
37	39.8		31.6			4.1			27.5	37	39			
38	40.8		32.4			4.2			28	38	40			
40	43.5		34.7			4.4			30	40	42.5			
42	45.5	±0.4	36.3	1.75	±0.07	4.6	2	±0.5	31	42	44.5	+0.3 0	1.9	3.75
45	48.5		38.9			4.8			33	45	47.5			
47	50.5		40.7			4.9			35	47	49.5			
48	51.5		41.5			5			36	48	50.5			
50	54.2		44			5.1			38	50	53			
52	56.2		45.8			5.2			40	52	55			
55	59.2		48			5.6			42	55	58			
56	60.2		48.8			5.7			43	56	59			
58	62.2	±0.45	50.4	2	±0.08	5.9	2.5	±0.5	44	58	61	+0.3 0	2.2	4.5
60	64.2		52			6.1			46	60	63			
62	66.2		53.6			6.3			47	62	65			
65	69.2		55.8			6.4			49	65	68			
68	72.5		58.5			7			52	68	71			
72	73.5		61.7			7.4			55	72	75			
75	79.5		63.9			7.8			57	75	78			
78	82.5		66.3			8.1			59	78	81			
80	85.5		68.9			8.3			61	80	83.5			
85	90.5		±0.55			72.7			2.5	±0.08	8.9			
90	95.5	76.7		9.4	68	90	93.5							
100	105.5	84.5		10.5	76	100	103.5							

※資料不及備載，其餘尺寸請洽伽納各窗口。