

KG-免鍵皮帶輪

S3M

齒距 3mm






本體材質	法蘭	表面處理
A6061	鋁	AS 白色陽極
		AB 黑色陽極
		AK 硬化陽極
		AN 無電解鍍
S45C	鐵	TB 染黑
		TN 無電解鍍

Y 凸型

Z 埋入型
當(S+1)+G≥W時底部是貫穿穴。

※軸套需另加購
(請參考LP458系列)

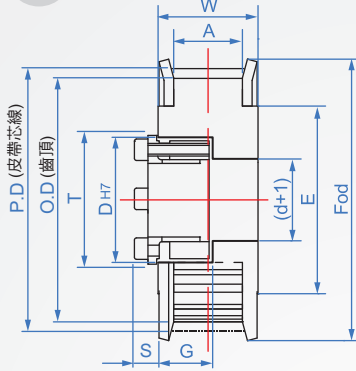

How to order

① ② ③
KG - 34 - S3M - 15 - Y10 -
TYPE 齒數 齒形 輪形
 寬度 寬度 軸孔d

選擇材質及表面

A6201+白色陽極.....	<input type="checkbox"/> AS
A6201+黑色陽極.....	<input type="checkbox"/> AB
A6201+硬化陽極.....	<input type="checkbox"/> AK
A6201+無電解鍍.....	<input type="checkbox"/> AN
S45C+染黑.....	<input type="checkbox"/> TB
S45C+無電解鍍.....	<input type="checkbox"/> TN

版 權 所 有 重 製 必 究	齒數	齒形 寬度	輪形	Y型 適用的軸孔 d徑					Z型 適用的軸孔 d徑		齒數	P.D	O.D	E	Fod		
				10			15		20							15	20
				8	8	8	8	8	8	8						8	
	32	S3M-10 A=11 W=15	凸型 Y								32	30.56	29.8	25	35		
	34											34	32.47	31.71	28	40	
	36											36	34.38	33.62			
	38					8~10	8~10	8~10	8	8		38	36.29	35.53	31.6		
	40											40	38.2	37.44	32.5	43.5	
	42						8~12	8~12	8~10	8~10		42	40.11	39.35	33	45	
	44											44	42.02	41.25	36	48	
	46			S3M-15 A=17 W=21	埋入型 Z					8~12		46	43.93	43.16	37	49	
	48							8~16	8~16				48	45.84	45.07	40	52
	50												50	47.75	46.98	40	52
	60					8~12		10~22	8~12		60	57.3	56.53	52	61		
	70	S3M-20 A=22 W=27								70	66.85	66.08	58	71			
	72										72	68.75	67.99	59	73		
	80					10~22		10~25		10~19	80	76.39	75.63	60	80		
	90										90	85.94	85.18	70	90		
	100							10~30			100	95.49	94.73	80	100		

※上表中齒數與軸徑尺寸以外的部品，伽納也可以設計並製作。

■LP458軸套尺寸表

單位：mm

d徑	8	10	12	14	15	16	18	20	22	24	25	28	30	
D	21	23	26	28	29	30	32	38	40	42	43	46	48	
G	15				18				22		23		24	
S	6				6.5				8				8.5	
T	23.5	25.5	28.5	30.5	31.5	32.5	34.5	42	44	46	47	50	52	