
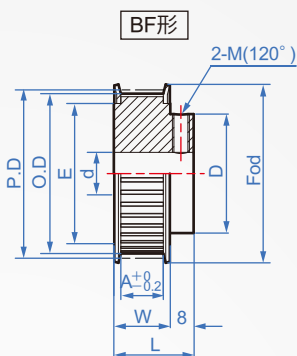




Pitch : 5.0mm

5GT

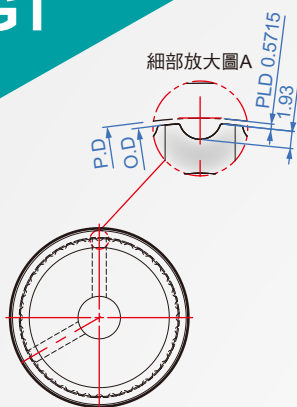

材質：鋁A6061+陽極處理。
(如需鐵材質請電洽加納窗口。)

皮帶寬度	9	15	20	25	30	40
共通尺寸	A=10.3 W=14 L=22	A=16.3 W=20 L=28	A=21.3 W=25 L=33	A=26.3 W=30 L=38	A=31.3 W=35 L=43	A=41.3 W=45 L=53

How to order

1 30 - 2 5GT-9 - 3 BF - 4 H8 -

齒數 TYPE 外形 孔形
 寬度 軸徑

選擇表面處理

- AS.....白色陽極
- AB.....黑色陽極
- AN.....無電解鍍
- AK.....硬化陽極

BF形可指定D徑變更
 例：原D徑32，變更30.....D30

齒數	TYPE 寬度	外形	孔形	軸孔d 加工最小值	P.D	O.D	齒數	D	E	Eod	
14				5~	22.28	21.14	14	12	16	26	
15					23.87	22.73	15	13	17	27	
16					25.46	24.32	16	15	18	28	
17					27.06	25.91	17	16	21	32	
18					28.65	27.5	18	18			
19					30.24	29.1	19	19	23.5	33.5	
20					8~	31.83	30.69	20	20	24	35
21						33.42	32.28	21	22	26	36
22						35.01	33.87	22			38
23						36.61	35.46	23	24	30	39
24				38.2		37.05	24	26	30	42	
25				39.79		38.65	25		32.5	43.5	
26				41.38		40.24	26	28	33	45	
27				10~		42.97	41.83	27	30	34	47
28	5GT-9					44.56	43.42	28	30	37	49
29						46.15	45.01	29	32	39	51
30	5GT-15				47.75	46.6	30				
31					49.34	48.2	31	34	40	52	
32					50.93	49.79	32	34	40	55	
33	5GT-20	AF			52.52	51.38	33		44	56	
34					54.11	52.97	34	36	46	58	
35					55.7	54.56	35				
36	5GT-25				57.3	56.16	36		49	61	
37		BF		58.89	57.74	37	38	50	63		
38				60.48	59.34	38					
39				12~	62.07	60.93	39				
40	5GT-30				63.66	62.52	40	40	54	66	
41					65.25	64.11	41				
42	5GT-40				66.85	65.7	42		58	71	
43					68.44	67.29	43	42	59	73	
44					70.03	68.89	44				
45					71.62	70.48	45				
46					73.21	72.07	46	44	62.5	77.5	
47					74.8	73.66	47				
48					76.39	75.25	48		65	83	
49				77.99	76.84	49	46	67.5			
50				79.58	78.43	50					
60				95.49	94.35	60	75	80	100		
70				111.41	110.27	70	80				
72				114.59	113.45	72		98	118		
80				127.32	126.18	80	90	110	135		
90				143.24	142.1	90		120	146		
100				159.15	158.01	100	100	130	165		

H 圓孔

圓孔+攻牙

P (120°) PV (90°)

軸孔徑	攻牙
5	M3
6~12	M4
13~30	M5
31~45	M6

鍵槽+攻牙

N (120°) NV (90°)

軸孔徑	kw(Js9)	kh	攻牙
8~10	3	1.4	M4
NK10	4	1.8	
11~12	4		
13~17	5	2.3	M5
18~22	6	2.8	
23~30	8	3.3	