
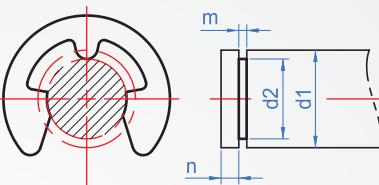


E Type Retaining Ring

WA705

ETW

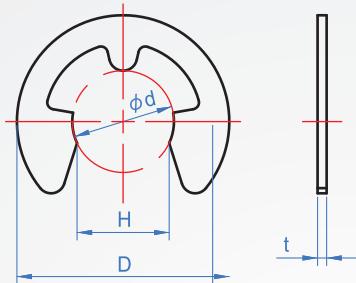

Material	Hardness	Finish
Carbon steel SUS420	HRC 44~52	Black oxide —

How to order

WA705 - 2 -
 TYPE No.
Material chosen
 Carbon steel.....
 SUS420.....
 SUS

No.	d	Tolerance	D	Tolerance	H	Tolerance	t	Tolerance	Applicable hole (Reference)			m	Tolerance	n min.
									d1 Above	d1 Below	d2			
1.2	1.2		3	±0.1	1		0.3	±0.25	1.4	2	1.2	0.4		0.5
1.5	1.5		4		1.3		0.4		2	2.5	1.5	0.5		0.8
1.9	1.9	+0 -0.09	4.5		1.7	+0 -0.25	0.4	±0.03	2.5	3	1.9	+0.06	0.5	+0.05 -0
2	2		5		1.7		0.4		2.5	3.2	2	-0	0.5	1
2.5	2.5		6		2.1		0.4		3.2	4	2.5		0.5	1
3	3		7		2.6		0.6		4	5	3		0.7	1
4	4	+0 -0.12	9	±0.2	3.5	+0 -0.3	0.6		5	7	4		0.7	1.2
5	5	+0 -0.12	11		4.3	+0 -0.3	0.6		6	8	5	+0.075 -0	0.7	1.2
6	6		12		5.2		0.8	±0.04	7	9	6		0.9	+0.1 -0
7	7		14		6.1		0.8		8	11	7		0.9	1.5
8	8	+0 -0.15	16		6.9	+0 -0.35	0.8		9	12	8	+0.09 -0	0.9	1.8
9	9	+0 -0.15	18		7.8	+0 -0.35	0.8		10	14	9		0.9	2
10	10		20		8.7		1	±0.05	11	15	10		1.15	2
12	12	+0 -0.18	23	±0.3	10.4	+0 -0.45	1		13	18	12	+0.11 -0	1.15	2.5
15	15	+0 -0.18	29		13	+0 -0.45	1.5	±0.06	16	24	15	-0	1.65	+0.14 -0
19	19	+0 -0.21	37		16.5		1.5		20	31	19	+0.13 -0	1.65	3.5
24	24	+0 -0.21	44		20.8	+0 -0.5	2	±0.07	25	38	24		2.2	4

※ There are other dimensions, welcome to contact ChaNa and order.