


Hole-C ring
WA700
IRTW



Material	hardness	Finish
Spring steel	HRC 44~52	Black (CAP)

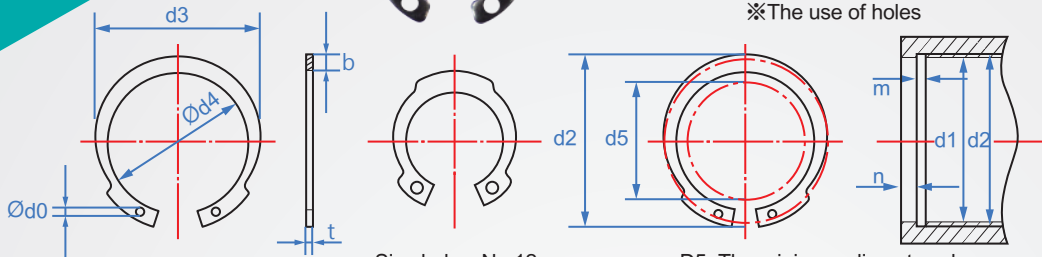

Size below No.12

※The use of holes

D5: The minimum diameter when the buckle is placed in d1.

How to order

WA700 - 10
TYPE No.

Unit : mm

No.	d3	tolerance	(d4)	t	tolerance	b	d0	tolerance	d5	Applicable holes (reference)				
										d1	d2	tolerance	m	tolerance
10	11.1	±0.18	7.7	1	±0.05	1.7	0.9	±0.3	5.9	10	10.4	+0.11 0	1.15	1.5
11	12.2		8.6			1.8			6.6	11	11.4			
12	13.3		9.7			1.8			7.6	12	12.5			
13	14.1		10.9			1.6			9	13	13.6			
14	15.1		11.7			1.7			9.8	14	14.6			
15	16.2		12.6			1.8			10.6	15	15.7			
16	17.3		13.5			1.9			11.4	16	16.8			
17	18.3		14.3			2			12.2	17	17.8			
18	19.5		15.3			2.1			13	18	19			
19	20.5		16.1			2.2			13.8	19	20			
20	21.5	16.9	2.3	14.5	20	21								
21	22.5	±0.2	17.7	1.2	±0.06	2.4	1.6	±0.4	15	21	22	+0.21 0	1.35	1.8
22	23.5		18.7			2.4			16	22	23			
24	25.9		20.7			2.6			17.5	24	25.2			
25	26.9		21.5			2.7			18.5	25	26.2			
26	27.9		22.3			2.8			19	26	27.2			
28	30.1		24.1			3			20.5	28	29.4			
30	32.1		25.7			3.2			22.5	30	31.4			
32	34.4		27.4			3.5			23.5	32	33.7			
34	36.5		29.1			3.7			25	34	35.7			
35	37.8		30			3.9			26	35	37			
36	38.8	±0.25	30.8	1.5	±0.07	4	1.6	±0.5	26.5	36	38	+0.25 0	1.65	+0.14 0
37	39.8		31.6			4.1			27.5	37	39			
38	40.8		32.4			4.2			28	38	40			
40	43.5		34.7			4.4			30	40	42.5			
42	45.5		36.3			4.6			31	42	44.5			
45	48.5		38.9			4.8			33	45	47.5			
47	50.5		40.7			4.9			35	47	49.5			
48	51.5		41.5			5			36	48	50.5			
50	54.2		44			5.1			38	50	53			
52	56.2		45.8			5.2			40	52	55			
55	59.2	48	5.6	42	55	58								
56	60.2	±0.45	48.8	2	±0.08	5.7	2.5	±0.7	43	56	59	+0.3 0	2.2	4.5
58	62.2		50.4			5.9			44	58	61			
60	64.2		52			6.1			46	60	63			
62	66.2		53.6			6.3			47	62	65			
65	69.2		55.8			6.4			49	65	68			
68	72.5		58.5			7			52	68	71			
72	73.5		61.7			7.4			55	72	75			
75	79.5		63.9			7.8			57	75	78			
78	82.5		66.3			8.1			59	78	81			
80	85.5		68.9			8.3			61	80	83.5			
85	90.5	±0.55	72.7	2.5	±0.09	8.9	3.2	±0.7	64	85	88.5	+0.35 0	3.2	+0.18 0
90	95.5		76.7			9.4			68	90	93.5			
100	105.5		84.5			10.5			76	100	103.5			

※The data is not ready for loading. Please contact CHENA for the remaining dimensions.

Copyright © CHENA INDUSTRIAL CO.,LTD ALL Rights Reserved.