

KG-免鍵皮帶輪

8M
齒距 8mm





本體材質	法蘭	表面處理
A6061	鋁	AS 白色陽極
		AB 黑色陽極
		AK 硬化陽極
		AN 無電解鍍
S45C	鐵	TB 染黑
		TN 無電解鍍

Y 凸型

Z 埋入型
當(S+1)+G≥W時底部是貫穿穴。

※軸套需另加購
(請參考LP458系列)

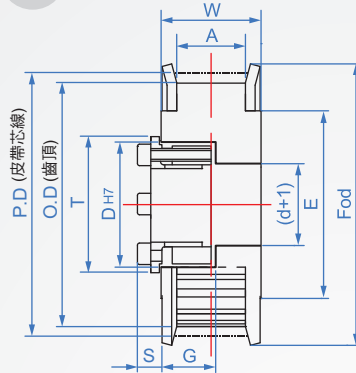

How to order



選擇材質及表面

A6201+白色陽極.....	AS
A6201+黑色陽極.....	AB
A6201+硬化陽極.....	AK
A6201+無電解鍍.....	AN
S45C+染黑.....	TB
S45C+無電解鍍.....	TN

單位: mm

齒數	齒形寬度	輪形	Y型 適用的軸孔 d徑					Z型 適用的軸孔 d徑			齒數	P.D	O.D	E	Fod		
			15	20	25	30	40	20	30	40							
18	8M-15 A=17 W=22	凸型 Y	8~12	8~12	8~12	8~12	8~12	8~10	8~10	8~10	18	45.84	44.46	35	50		
19			8~16	8~16	8~16	8~16	8~16	8~12	8~12	8~12	19	48.38	47.01	40	55		
20											20	50.93	49.56				
22									8~14	8~14	8~14	22	56.02	54.65	44	62	
24			8~19	8~19	8~19	8~19	8~19		8~16	8~16	8~16	24	61.12	59.74	50	70	
25												25	63.66	62.29			
26												26	66.21	64.84	55	75	
28			8M-20 A=22 W=27	凸型 Y	10~22	10~22	10~22	10~22		10~19	10~19		28	71.3	69.93	60	80
30					10~25	10~25	10~25	10~25		10~22	10~22		30	76.39	75.02	65	85
32												32	81.49	80.12	70	90	
34	8M-25 A=28 W=33	凸型 Y	10~30	10~30	10~30	10~30		10~28	10~28		34	86.58	85.21	75	95		
36											36	91.67	90.3				
38										38	96.77	95.39	85	105			
40	8M-30 A=33 W=38	埋入型 Z	10~35	10~35	10~35	10~35		10~35	10~35		40	101.86	100.49	90	110		
42											42	106.95	105.58	95	115		
44			10~22						10~19			44	112.05	110.67	98	118	
46												46	117.14	115.77	105	125	
48					10~45	10~45	10~45		10~45	10~45		48	122.23	120.86	110	128	
50												50	127.32	125.95		135	
60												60	152.79	151.42	128	160	
70			8M-40 A=44 W=49	埋入型 Z	10~40								70	178.25	176.88	157	188
72													72	183.35	181.97		
80							10~60	10~60	10~60		10~55	10~55		80	203.72	202.35	180
90												90	229.18	227.81	195	235	
100										100	254.65	253.28	220	260			

※上表中齒數與軸徑尺寸以外的部品，本社也可以設計並製作。

LP458軸套尺寸表

單位: mm

d徑	8	10	12	14	15	16	18	20	22	24	25	28	30	32	35	38	40	45	50	55	60	65
D	21	23	26	28	29	30	32	38	40	42	43	46	48	50	57	60	62	67	72	77	82	87
G	15			18			22	23	24			25	27		28			29				
S	6			6.5			8			8.5			10			10.5			11			
T	23.5	25.5	28.5	30.5	31.5	32.5	34.5	42	44	46	47	50	52	54	62	65	67	72	77	83	87	92