



無扣環
BH553

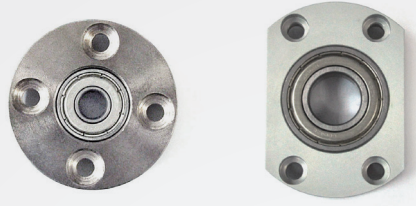

外型	材質	表面處理	軸承
F 圓形	鐵S45C	TB 染黑	SUJ2 (JIS 0級)
		TN 鍍無電解鍍	
H 二平面形	鋁A6061	AS 白色陽極	
		SUS303	

※沉頭孔貫穿部攻牙設計，正反二面皆可安裝使用。
※附屬品C型扣環(SUS304)。

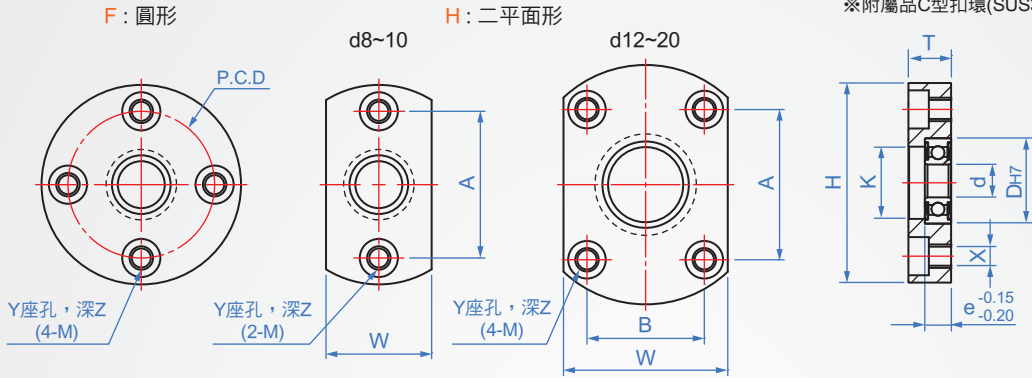

How to order

BH553 - 1 - 698ZZ - 2

TYPE 軸承代號

選擇外型
圓形..... F
二平面形..... H

選擇表面處理
鐵+染黑..... TB
鐵+鍍無電解鍍..... TN
鋁+白色陽極..... AS
SUS303..... SUS

版權所有 重製必究

軸承代號	d	DH7	容許公差	T	H	e	W	K	P.C.D	A	B	X (M粗牙)	Y	Z			
678ZZ	8	12	+0.018 0	6	34	3.5	18	10	25	25		3.3 (M4x0.8)	8	4.4			
698ZZ		19	+0.021 0	8	41	6	25	15	31	31		4.3 (M5x0.7)	6.5	3.4			
608ZZ		22		9	45	7	29	18	35	35							
628ZZ		24		10	47	8	32	20	37	37							
6700ZZ	10	15	+0.018 0	7.5	37	4	22	12	27	27		4.3 (M5x0.8)	8	4.4			
6800ZZ		19	41		5	25	15	31	31								
6900ZZ		22	+0.021 0	8	45	6	29	19	35	35							
6000ZZ		26		10	50	8	34	22	40	40							
6200ZZ	30	11	54	9	38	24	44	44									
6701ZZ	12	18	+0.018 0	7.5	40	4	25	15	30	30		4.3 (M5x0.8)	8	4.4			
6801ZZ		21	44		5	29	17	34	34								
6901ZZ		24	+0.021 0	8	48	6	31	21	38	38							
6001ZZ		28		10	52	8	36	24	42	42							
6201ZZ	32	+0.025 0	12	56	10	40	26	46	46								
6702ZZ	15	21	+0.021 0	7.5	44	4	29	18	34	34		5.2 (M6x1.0)	9.5	5.4			
6802ZZ		24			47	5	32	20	37	37							
6902ZZ		28	9	57	7	37	25	45	45								
6002ZZ		32	+0.025 0	11	60	9	40	28	48	48							
6202ZZ	35	13		64	11	44	29	52	52								
6803ZZ	17	26	+0.021 0	7.5	50	5	34	22	40	40		4.3 (M5x0.8)	8	4.4			
6903ZZ		30			9	60	7	38	27	48					48		
6003ZZ		35	+0.025 0	12	66	10	44	31	54	54							
6203ZZ		40		14	72	12	50	34	60	60							
6704ZZ	20	27	+0.021 0	7.5	51	4	35	23	41	32	25	4.3 (M5x0.8)	8	4.4			
6804ZZ		32	+0.025 0		9	60	7	40	28	48					38	5.2 (M6x1.0)	9.5
6904ZZ		37		11	69	9	47	34	56	51					24		
6004ZZ		42		14	77	12	54	36	64	56					32		
6204ZZ		47	16	81	14	58	40	68	59	34					6.8 (M8x1.25)	11	6.5