


軸用-C型扣環
WA704

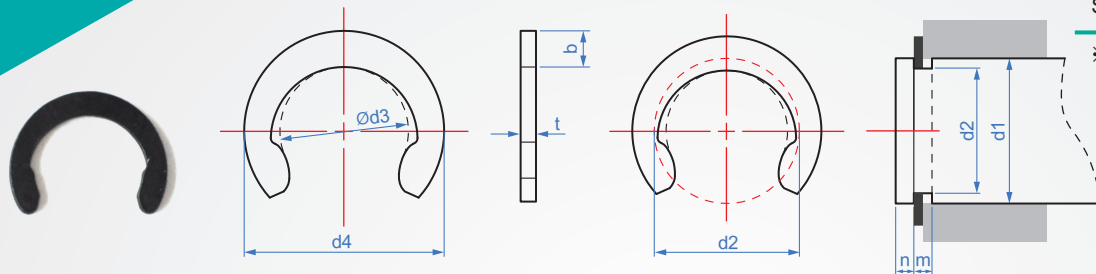

材質	硬度	表面處理
碳鋼	HRC 44~52	染黑
SUS420		-

※SUS材質尺寸不多，請來電洽詢

How to order

WA704 - 31
TYPE No.

單位：mm

No.	d3	公差	d4	b	t	公差	適用軸(參考)					
							d1	d2	公差	m	公差	n最小
12	2.59	+0.05 -0.10	4.17	0.79	0.4	±0.03	3.2	2.69	±0.04	0.48	+0.04 0	0.5
14	3.25		4.96	1.0	0.5		4	3.36		0.60		
15	3.32		5.20	0.94	0.4		±0.05	3.43		0.50		
18	4.09	+0.07 -0.13	6.19	1.05	0.4	±0.03	4.8	4.19	±0.05	0.48	+0.06 0	0.6
21	4.75		6.99	1.12			5.6	4.90		0.7		0.7
25	5.36		7.90	1.27			6.4	5.59		0.8		0.8
31	6.86		9.56	1.35			7.9	7.01		0.9		0.9
37	8.33		11.37	1.52			9.5	8.51		1.0		1.0
40	9.12		12.32	1.60			10.3	9.25		1.1		1.1
43	9.80	±0.15	13.10	1.65	0.6	±0.04	11.1	9.98	±0.05	0.7	+0.06 0	1.2
46	10.54		14.00	1.73			11.9	10.69				1.3
50	11.20		14.76	1.78			12.7	11.43				1.4
56	12.62	±0.18	16.56	1.98	0.9	±0.05	14.3	12.88	±0.07	1	+0.08 0	1.4
81	18.31		23.23	2.46								1.4

※資料不及備載，其餘尺寸請洽伽納各窗口。