


法蘭-鋼銷  
**PP634**

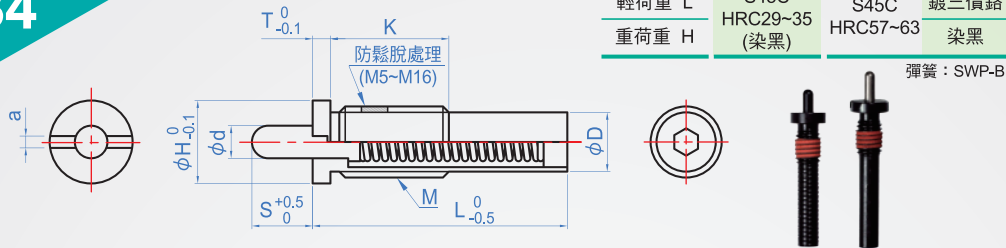

Type	本體材質	銷	
		材質	表面處理
輕荷重 L	S45C	S45C	鍍三價鉻
重荷重 H	HRC29~35 (染黑)	HRC57~63	染黑

彈簧：SWP-B

How to order



單位 :mm

M 粗螺紋	S	L	d	D	H	K	T	a	荷重(N)				適用扳手	
									輕荷重用 L		重荷重用 H			
									min.	max.	min.	max.		
M3	1.5	10	1.1	2.35	5	5	1.5	0.5	0.49	1.0	0.78	2.9	一字起子	
	3	15							0.29	1.0	0.78	2.9		
M4	2	15	1.6	3.1	6	6	1.8	0.7	1.0	2.0	2.9	8.8		P-1
	4	24							0.59	2.0	2.0	8.8		
M5	3	20	2	3.8	7	8	2	1.2	2.0	9.8	4.9	19.6	P-2A	
	5	27							2.0	9.8	2.9	19.6		
M6	3	25	2.5	4.7	8	9	2.5	1.5	5.9	9.8	7.8	29.4		P-3
	5	30							2.0	9.8	4.9	29.4		
M8	3	25	3.1	6.1	10	12	2.5	1.5	5.9	9.8	14.7	29.4	P-4	
	5	27							2.9	9.8	7.8	29.4		
M10	5	30	3.8	7.5	12	15	3	2	5.9	14.7	8.8	49.0		P-4
	10	43							2.9	14.7	7.8	49.0		
M12	5	30	5.5	9.2	14	20	3	2	5.9	14.7	18.6	49.0	P-4	
	10	43							2.9	19.6	7.8	49.0		
M16	15	51	8	13	18	25	3	2	2.9	19.6	4.9	49.0		P-4
	10	60							5.9	39.2	12.7	78.5		
	15	60							3.9	39.2	12.7	78.5		
	20	85							4.9	39.2	9.8	78.5		
	30	125							2.9	39.2	6.9	78.5		
	40	125							4.9	39.2	6.9	78.5		

M3、M4無防鬆脫處理

荷重N×0.101972=荷重(kgf)